



7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

## СБ2л 3х120-10 ТУ У 27.3-00214534-091:2017



Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured

Cables are used for laying:

• in soil (trenches) with high corrosiveness, as well as with vagabond currents

• with a risk of mechanical damage and no tensile forces in operation

#### **TECHNICAL SPECIFICATIONS**

Rated voltage	kV	10
Number and rated area of conductors	mm <sup>2</sup>	3 x 120
	mm	
Insulation thikness between conductors	mm	5.5
Insulation thikness of conductor-sheath	mm	4
Sheath thikness	mm	1.56
Permissible continious current rating *		
• by aerial laying	А	305
• by burial	А	284
Operating temperature range	°C	-50 +50
Minimum bending radius by laying	mm	795
Level difference along the laying rout, not more than	m	15
Metal shaeth outer diameter (for reference only)	mm	41
Rated outer diameter of the cable (for reference) **	mm	53
Cable weight (approximate)	kg/km	7930
Rated factory cable length and gross weight of the delivery	m, t	# 16a: 350 • 3.0
on the drums ***		# 18: 400 • 3.6
Notes:		

When ordering it is neccesary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C,

thermal resistivity of soil 1.2  $^{\circ}\!K\!\cdot\!m/W$ , laying depth in the soil 0.7 m

 $^{**}$  The external diameter may differ from the rated up to  $\pm$  10 %






7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

# СБ2л 3х120-10 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured

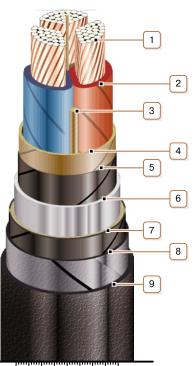

#### 0 10 20 30 40

### CONSTRUCTION

- 1. Copper multiwire compact conductor
- 2. Impregnated paper insulation
- 3. Cable paper bundle
- 4. Belt insulation
- 5. Conducting paper screen
- 6. Lead sheath
- 7. Double-layer plastic-tape bedding
- 8. Double steel-tape armour
- 9. Outer covering

Note: Conductor twisting is not illustrated