





7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

## ЦСБ2л 3х150-6 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with non-draining impregnated paper insulation, lead-sheathed, steel-tape armoured

Cables are used for laying:

- · without level difference limitation
- in soil (trenches) with high corrosiveness, as well as with vagabond currents
- with a risk of mechanical damage and no tensile forces in operation

## **TECHNICAL SPECIFICATIONS**

Rated voltage	kV	6
Number and rated area of conductors	mm²	3 x 150
Insulation thikness between conductors	mm	4
Insulation thikness of conductor-sheath	mm	2.95
Sheath thikness	mm	1.52
Permissible continious current rating *		
by aerial laying	Α	392
• by burial	Α	358
Operating temperature range	°C	-50 +50
Minimum bending radius by laying	mm	780
Metal shaeth outer diameter (for reference only)	mm	39
Rated outer diameter of the cable (for reference) **	mm	52
Cable weight (approximate)	kg/km	8380
Rated factory cable length and gross weight of the delivery	m, t	# 16a: 370 • 3.4
on the drums ***		# 18: 430 • 4.1

Notes:

When ordering it is neccesary to agree the factory length of the product with the manufacturer

<sup>\*</sup> Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K • m/W, laying depth in the soil 0.7 m

<sup>\*\*</sup> The external diameter may differ from the rated up to  $\pm$  10 %








7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

## ЦСБ2л 3х150-6 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with non-draining impregnated paper insulation, lead-sheathed, steel-tape armoured

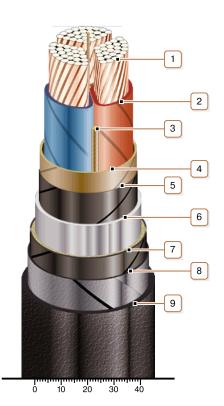

## **CONSTRUCTION**

- 1. Copper multiwire compact conductor
- 2. Impregnated paper insulation
- 3. Cable paper bundle
- 4. Belt insulation
- 5. Conducting paper screen
- 6. Lead sheath
- 7. Double-layer plastic-tape bedding
- 8. Double steel-tape armour
- 9. Outer covering

Note: Conductor twisting is not illustrated