



## **АПВБнг-45 1х300 ТУ У 31.3-00214534-060:2011**

Power cables with aluminium conductor, flame-retardant, with XLPE and with PVC compound outer sheath

---

For the cable of this mark correspond the foreign-made analogues:

АПВБнг(В) (RU) • АПВБнг(А) (RU)

Technical cable requirements correspond to IEC 60840

---

Cables are used for laying:

- *in premises, tunnels, ducts, mines, dry soil and outdoor under shelter*
- *in bunches*

---

It is possible to manufacture cables with an integrated fiber-optic module.

Order entry example:

АПВБнг-45 1х300/95 (ОМ) ТУ У 31.3-00214534-060:2011

In conjunction with the DTS system, the integrated fiber-optic module can act as a distributed cable line temperature sensor.

---

It is possible to manufacture cable with sealed conductor.

Order entry example:

АПВБнг-45 1х300/95 (г) ТУ У 31.3-00214534-060:2011

---

Fire safety code in accordance with ДСТУ 4809:2007: ПБ130000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category B*



## АПвЕВнг-45 1х300 ТУ У 31.3-00214534-060:2011

Power cables with aluminium conductor, flame-retardant, with XLPE and with PVC compound outer sheath

### TECHNICAL SPECIFICATIONS

|                                                                                  |                 |                                               |
|----------------------------------------------------------------------------------|-----------------|-----------------------------------------------|
| Rated voltage                                                                    | kV              | 45                                            |
| Maximum voltage                                                                  | kV              | 52                                            |
| Conductor rated area                                                             | mm <sup>2</sup> | 300                                           |
| Minimum screen cross-section                                                     | mm <sup>2</sup> | 35                                            |
| Partial discharge factor for rated voltage, not more than                        | pC              | 6                                             |
| Permissible short circuit current across the screen of minimum cross-section     | kA              | 5.1                                           |
| Maximum permissible short-circuit current in core                                | kA              | 28.2                                          |
| Permissible continuous current rating by aerial laying *                         |                 |                                               |
| • in trefoil formation with double-side screen earthing                          | A               | 524                                           |
| • in trefoil formation with single-side screen earthing or cross screen earthing | A               | 541                                           |
| • plane with double-side screen earthing                                         | A               | 564                                           |
| • plane with single-side screen earthing or cross screen earthing                | A               | 640                                           |
| Permissible continuous current rating by burial *                                |                 |                                               |
| • in trefoil formation with double-side screen earthing                          | A               | 432                                           |
| • in trefoil formation with single-side screen earthing or cross screen earthing | A               | 448                                           |
| • plane with double-side screen earthing                                         | A               | 417                                           |
| • plane with single-side screen earthing or cross screen earthing                | A               | 468                                           |
| Maximum permissible conductor temperature                                        |                 |                                               |
| • Continuous                                                                     | °C              | +90                                           |
| • in emergency operation                                                         | °C              | +130                                          |
| • at short circuit                                                               | °C              | +250                                          |
| Operating temperature range (in climate version NF)                              | °C              | -50 ... +50                                   |
| Operating temperature range (in climate version T)                               | °C              | -25 ... +65                                   |
| Minimum bending radius by laying                                                 | mm              | 848                                           |
| Rated outer diameter of the cable (for reference) **                             | mm              | 53                                            |
| Cable weight (approximate)                                                       | kg/km           | 4320                                          |
| Rated factory cable length and gross weight of the delivery on the drums ***     | m, t            | # 22УД-60: 635 • 3.7<br># 25УД-90: 1068 • 6.2 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: conductor temperature 90 °C, air temperature 30 °C, soil temperature 20 °C, load factor 1.0, thermal resistivity of soil 1.0 °K·m/W, laying depth in the ground 1.5 m, while laying in flat formation the distance between cables in clear is equal to the cable diameter, while laying in trefoil formation cables are laid side by side


\*\* The external diameter may differ from the rated up to ± 10 %

\*\*\* Отклонение фактической массы брутто от указанного значения может составлять ± 7 %



## АПвЕВнг-45 1х300 ТУ У 31.3-00214534-060:2011

Power cables with aluminium conductor, flame-retardant, with XLPE and with PVC compound outer sheath

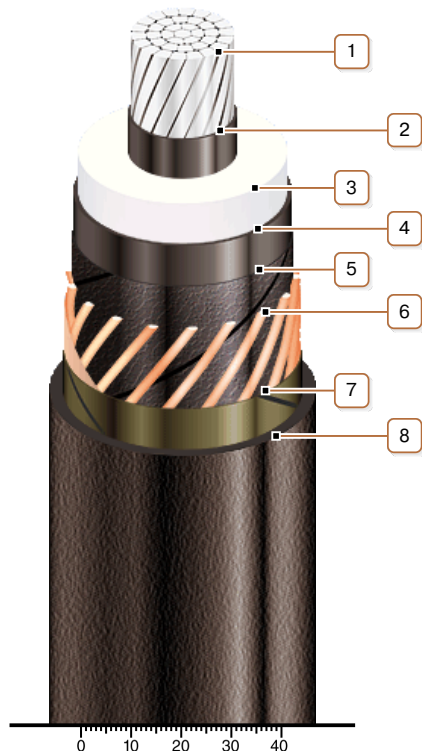

### CONSTRUCTION

**1. Aluminium multiwire compacted conductor**

*Note: It is possible to manufacture cable with sealed conductor.*

**2. Inner extruded semiconducting layer**

**3. XLPE insulation**

**4. Outer extruded semiconducting layer**

**5. Lapping layer of semiconductive swellable tape**

**6. Copper screen**

*Note: It is possible to manufacture a cable with a fiber optic module built into the screen, including as a DTS system sensor*

**7. Lapping layer of glass tape**

**8. Low flammable PVC compound outer sheath**