



## **ПвЭБП-20 3x95 ТУ У 31.3-00214534-017-2003**

Three-core power cables with copper conductors, with XLPE, steel-tape armoured, with polyethylene outer sheath

---

For the cable of this mark correspond the foreign-made analogues:  
2XSEYB2Y (DE) • Cu/SC/XLPE/SC/CuT/STA/PE (GB) • ПвБП (RU)  
Technical cable requirements correspond to IEC 60502-2

---

Cables are used for laying:

- *in places, where mechanical impacts on cable are possible, except tensile forces*
  - *in soil (trenches)*
  - *in the air, including cable structures, if provided the additional fire protection*
- 

It is possible to manufacture cables with extruded semiconductor layer along outer sheath.

Order entry example:

ПвЭБП-П-20 3x95/16 ТУ У 31.3-00214534-017-2003

An extruded semiconductor layer along outer sheath ensures the correct testing of cable line with sections of underground laying in polymer pipes.

---

It is possible to manufacture cables with an integrated fiber-optic module.

Order entry example:

ПвЭБП-20 3x95/16 (OM) ТУ У 31.3-00214534-017-2003

In conjunction with the DTS system, the integrated fiber-optic module can act as a distributed cable line temperature sensor.

---

It is possible to manufacture cable with sealed conductors.

Order entry example:

ПвЭБП-20 3x95/16 (r) ТУ У 31.3-00214534-017-2003

---



## ПВЭБП-20 3x95 TY Y 31.3-00214534-017-2003

Three-core power cables with copper conductors, with XLPE, steel-tape armoured, with polyethylene outer sheath

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                                              |
|------------------------------------------------------------------------------|-----------------|----------------------------------------------|
| Rated voltage                                                                | kV              | 20                                           |
| Maximum voltage                                                              | kV              | 24                                           |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 3 x 95                                       |
| Insulation thickness                                                         | mm              | 5.5                                          |
| Minimum screen cross-section                                                 | mm <sup>2</sup> | 16                                           |
| Permissible short circuit current across the screen of minimum cross-section | kA              | 3.3                                          |
| Maximum permissible short-circuit current in core                            | kA              | 13.6                                         |
| Permissible continuous current rating *                                      |                 |                                              |
| • by aerial laying                                                           | A               | 307                                          |
| • by burial                                                                  | A               | 263                                          |
| Partial discharge factor for rated voltage, not more than                    | pC              | 6                                            |
| Maximum permissible conductor temperature                                    |                 |                                              |
| • Continuous                                                                 | °C              | +90                                          |
| • in emergency operation                                                     | °C              | +130                                         |
| • at short circuit                                                           | °C              | +250                                         |
| Operating temperature range                                                  | °C              | -60 ... +50                                  |
| Minimum bending radius by laying                                             | mm              | 1104                                         |
| Rated outer diameter of the cable (for reference) **                         | mm              | 69                                           |
| Cable weight (approximate)                                                   | kg/km           | 6860                                         |
| Rated factory cable length and gross weight of the delivery on the drums     | m, t            | # 22УД-60: 339 • 3.2<br># 25УД-90: 611 • 5.8 |

**Notes:**

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: conductor temperature 90 °C, air temperature 30 °C, soil temperature 20 °C, load factor 1.0, thermal resistivity of soil 1.5 °K·m/W, laying depth in the ground 0.8 m, shields are grounded at both ends of the line

\*\* The external diameter may differ from the rated up to ± 10 %



**ПВЭБП-20 3x95**  
**ТУ У 31.3-00214534-017-2003**

Three-core power cables with copper conductors, with XLPE, steel-tape armoured, with polyethylene outer sheath

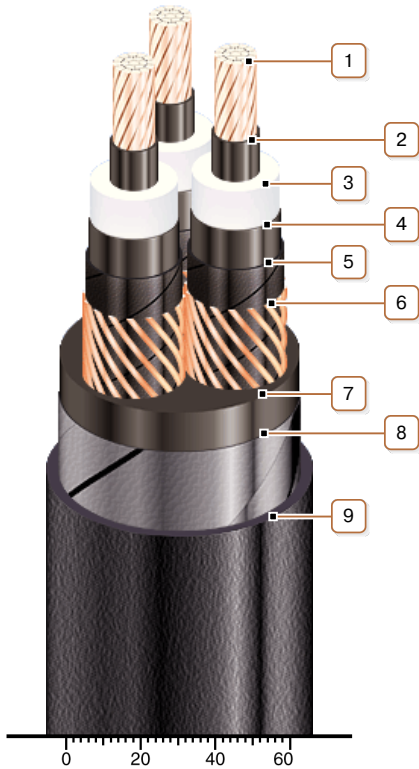

### CONSTRUCTION

**1. Copper multiwire compact conductor**

*Note: It is possible to manufacture cable with sealed conductors.*

**2. Inner extruded semiconducting layer**

**3. XLPE insulation**

**4. Outer extruded semiconducting layer**

**5. Lapping layer of semiconductive swellable tape**

**6. Copper screen**

**7. Extruded filling of PVC compound**

**8. Double galvanized steel-tape armour**

**9. Outer sheath of polyethylene or polyethylene copolymer**

*Note: It is possible to manufacture cable with extruded semiconducting layer along outer sheath*

*Note: Conductor twisting is not illustrated*