



7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

ААБлГ 1х630-1 ГОСТ 18410-73, ТУ 16.К71-269-97



Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-tape armoured

Cables are used for laying:

• in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosivenes

- in fire-risk premises
- on technological trestles
- on special cable bridges
- on bridges

• with a risk of mechanical damage and no tensile forces in operation

Fire safety code in accordance with **ДСТУ** 4809:2007: ПБ10000000

Products of this mark meet the requirements:

• single wire cable flame retardance

TECHNICAL SPECIFICATIONS

Rated voltage	kV	1
Number and rated area of conductors	mm²	1 x 630
Insulation thikness of conductor-sheath	mm	2.1
Sheath thikness	mm	1.5
Permissible continious direct current rating *		
• by aerial laying	А	1122
• by burial	А	856
Operating temperature range	°C	-50 +50
Minimum bending radius by laying	mm	1075
Level difference along the laying rout, not more than	m	25
Metal shaeth outer diameter (for reference only)	mm	37
Rated outer diameter of the cable (for reference) **	mm	43
Cable weight (approximate)	kg/km	3630
Rated factory cable length and gross weight of the delivery	m, t	# 18: 600 • 2.6
on the drums ***		

Notes:

When ordering it is neccesary to agree the factory length of the product with the manufacturer

* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K \cdot m/W, laying depth in the soil 0.7 m

 ** The external diameter may differ from the rated up to \pm 10 %






7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua



ААБлГ 1х630-1 ГОСТ 18410-73, ТУ 16.К71-269-97

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-tape armoured

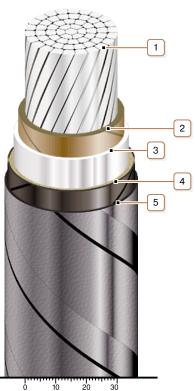

CONSTRUCTION

- 1. Aluminium multiwire compacted conductor
- 2. Impregnated paper insulation
- 3. Aluminium sheath
- 4. Single-layer plastic-tape bedding
- 5. Double galvanized steel-tape armour

20 10