



## ЦААБл 3x120(ож)-6 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, aluminium-sheathed, steel-tape armoured

Cables are used for laying:

- *without level difference limitation*
- *in soil (trenches) with medium corrosiveness without vagabond currents*
- *with a risk of mechanical damage and no tensile forces in operation*

### TECHNICAL SPECIFICATIONS


|  |                 |                 |
|--|-----------------|-----------------|
| Rated voltage  | kV              | 6               |
| Number and rated area of conductors  | mm <sup>2</sup> | 3 x 120         |
| Insulation thickness between conductors                                      | mm              | 4               |
| Insulation thickness of conductor-sheath                                     | mm              | 2.95            |
| Sheath thickness   | mm              | 1.45            |
| Permissible continuous current rating *                                      |                 |                 |
| • <i>by aerial laying</i>  | A               | 248             |
| • <i>by burial</i>   | A               | 243             |
| Operating temperature range  | °C              | -50 ... +50     |
| Minimum bending radius by laying   | mm              | 1150            |
| Metal sheath outer diameter (for reference only)                             | mm              | 34              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 46              |
| Cable weight (approximate)   | kg/km           | 3210            |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 550 • 2.2 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*

*\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*


*\*\* The external diameter may differ from the rated up to ± 10 %*



**ЦААБл 3x120(ож)-6**  
**ТУ У 27.3-00214534-091:2017**

Power cables with aluminium conductors, with non-draining impregnated paper insulation, aluminium-sheathed, steel-tape armoured

**CONSTRUCTION**

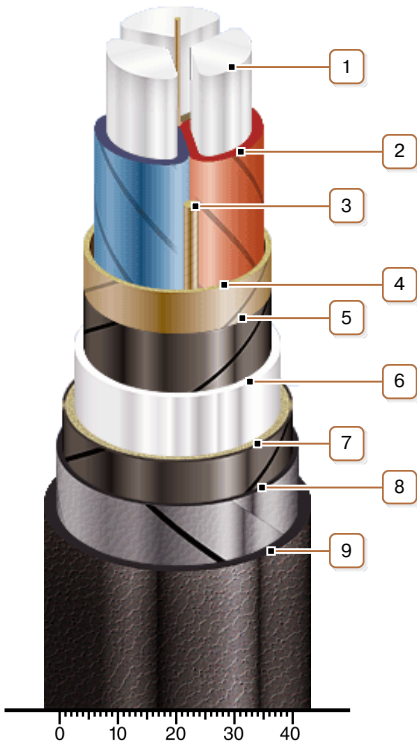

1. Aluminium conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Conducting paper screen
6. Aluminium sheath
7. Single-layer plastic-tape bedding
8. Double steel-tape armour
9. Outer covering

Note: Conductor twisting is not illustrated