





7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

ЦААБ2л 3х185(ож)-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, aluminium-sheathed, steel-tape armoured

Cables are used for laying:

- · without level difference limitation
- in soil (trenches) with high corrosiveness without vagabond currents
- in soil (trenches) with medium corrosiveness, as well as with vagabond currents
- · in mines, non-hazardous as for gas and dust
- · with a risk of mechanical damage and no tensile forces in operation

TECHNICAL SPECIFICATIONS

Rated voltage	kV	10
Number and rated area of conductors	mm²	3 x 185
Insulation thikness between conductors	mm	5.5
Insulation thikness of conductor-sheath	mm	4
Sheath thikness	mm	1.75
Permissible continious current rating *		
by aerial laying	Α	298
• by burial	Α	275
Operating temperature range	°C	-50 +50
Minimum bending radius by laying	mm	1400
Metal shaeth outer diameter (for reference only)	mm	44
Rated outer diameter of the cable (for reference) **	mm	56
Cable weight (approximate)	kg/km	4760
Rated factory cable length and gross weight of the delivery	m, t	# 18: 370 • 2.2
on the drums ***		# 20: 590 • 3.4
		# 22: 670 • 4.0

Notes:

When ordering it is neccesary to agree the factory length of the product with the manufacturer

^{*} Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K • m/W, laying depth in the soil 0.7 m

^{**} The external diameter may differ from the rated up to \pm 10 %








7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

ЦААБ2л 3х185(ож)-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, aluminium-sheathed, steel-tape armoured

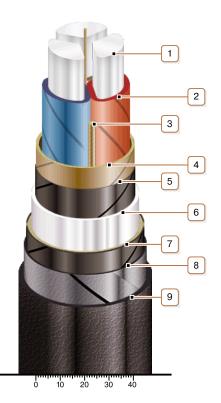

CONSTRUCTION

- 1. Aluminium conductor
- 2. Impregnated paper insulation
- 3. Cable paper bundle
- 4. Belt insulation
- 5. Conducting paper screen
- 6. Aluminium sheath
- 7. Double-layer plastic-tape bedding
- 8. Double steel-tape armour
- 9. Outer covering

Note: Conductor twisting is not illustrated