



## ЦААБ2п 3x185-10 TY Y 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, aluminium-sheathed, steel-tape armoured

Cables are used for laying:

- *without level difference limitation*
- *in soil (trenches) with high corrosiveness without vagabond currents*
- *in soil (trenches) with medium corrosiveness, as well as with vagabond currents*
- *in mines, non-hazardous as for gas and dust*
- *with a risk of mechanical damage and no tensile forces in operation*

### TECHNICAL SPECIFICATIONS

|  |                 |                 |
|--|-----------------|-----------------|
| Rated voltage  | kV              | 10              |
| Number and rated area of conductors  | mm <sup>2</sup> | 3 x 185         |
| Insulation thickness between conductors                                      | mm              | 5.5             |
| Insulation thickness of conductor-sheath                                     | mm              | 4               |
| Sheath thickness   | mm              | 1.8             |
| Permissible continuous current rating *                                      |                 |                 |
| • <i>by aerial laying</i>  | A               | 298             |
| • <i>by burial</i>   | A               | 275             |
| Operating temperature range  | °C              | -50 ... +50     |
| Minimum bending radius by laying   | mm              | 1475            |
| Metal sheath outer diameter (for reference only)                             | mm              | 49              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 59              |
| Cable weight (approximate)   | kg/km           | 5140            |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 22: 580 • 3.8 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## ЦАБ2л 3x185-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, aluminium-sheathed, steel-tape armoured

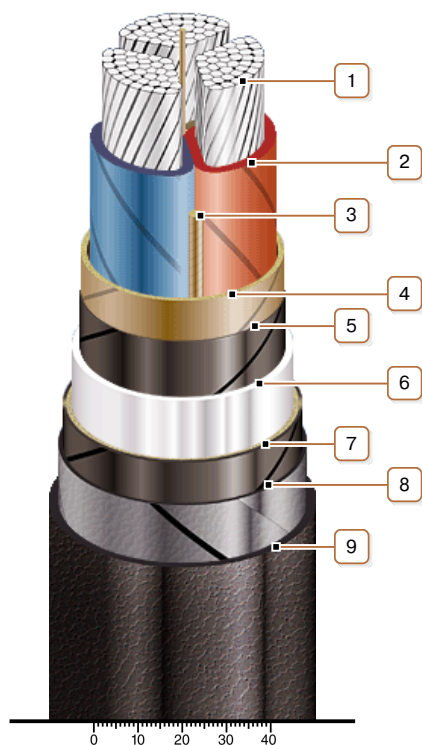

### CONSTRUCTION

1. Aluminium multiwire compacted conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Conducting paper screen
6. Aluminium sheath
7. Double-layer plastic-tape bedding
8. Double steel-tape armour
9. Outer covering

*Note: Conductor twisting is not illustrated*