

## ААБ2лШв 1х300-1 ГОСТ 18410-73, ТУ 16.К71-269-97

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-tape armoured, with PVC-compound protection hose

Cables are used for laying:

- in soil (trenches) with high corrosiveness without vagabond currents
- in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosiveness
- on technological trestles
- in mines, non-hazardous as for gas and dust
- with a risk of mechanical damage and no tensile forces in operation

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- single wire cable flame retardance

### TECHNICAL SPECIFICATIONS


|  |                 |                  |
|--|-----------------|------------------|
| Rated voltage  | kV              | 1                |
| Number and rated area of conductors  | mm <sup>2</sup> | 1 x 300          |
| Insulation thickness of conductor-sheath                                     | mm              | 1.8              |
| Sheath thickness   | mm              | 1.3              |
| Permissible continuous direct current rating *                               |                 |                  |
| • by aerial laying   | A               | 695              |
| • by burial  | A               | 562              |
| Operating temperature range  | °C              | -50 ... +50      |
| Minimum bending radius by laying   | mm              | 975              |
| Level difference along the laying route, not more than                       | m               | 25               |
| Metal sheath outer diameter (for reference only)                             | mm              | 27               |
| Rated outer diameter of the cable (for reference) **                         | mm              | 39               |
| Cable weight (approximate)   | kg/km           | 2640             |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16a: 630 • 1.9 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## ААБ2лШв 1х300-1 ГОСТ 18410-73, ТУ 16.К71-269-97

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-tape armoured, with PVC-compound protection hose

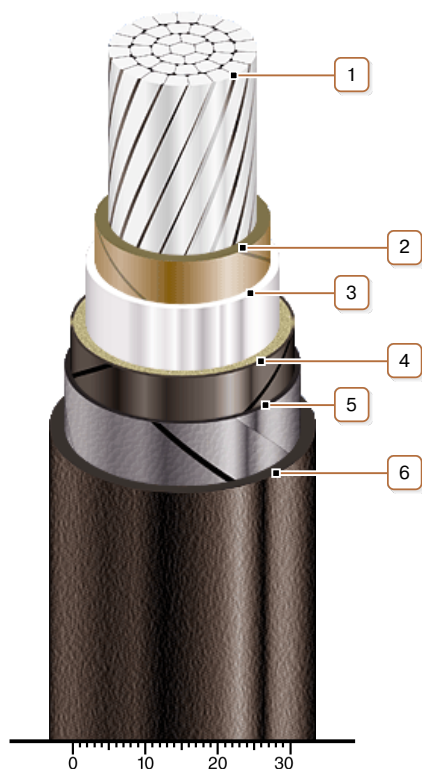

### CONSTRUCTION

1. *Aluminium multiwire compacted conductor*
2. *Impregnated paper insulation*
3. *Aluminium sheath*
4. *Double-layer plastic-tape bedding*
5. *Double steel-tape armour*
6. *Pressed PVC compound protection hose*