

## ААБнлШнг 3х150-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-tape armoured, with low-flammable PVC-compound protection hose

Cables are used for laying:

- *in fire-risk premises*
- *on technological trestles*
- *with a risk of mechanical damage and no tensile forces in operation*
- *in bunches*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

### TECHNICAL SPECIFICATIONS

|  |                 |   |
|--|-----------------|---|
| Rated voltage  | kV              | 10  |
| Number and rated area of conductors  | mm <sup>2</sup> | 3 x 150   |
| Insulation thickness between conductors                                      | mm              | 5.5   |
| Insulation thickness of conductor-sheath                                     | mm              | 4   |
| Sheath thickness   | mm              | 1.75  |
| Permissible continuous current rating *                                      |                 |   |
| • <i>by aerial laying</i>  | A               | 264   |
| • <i>by burial</i>   | A               | 246   |
| Operating temperature range  | °C              | -50 ... +50   |
| Minimum bending radius by laying   | mm              | 1400  |
| Level difference along the laying rout, not more than                        | m               | 15  |
| Metal sheath outer diameter (for reference only)                             | mm              | 44  |
| Rated outer diameter of the cable (for reference) **                         | mm              | 56  |
| Cable weight (approximate)   | kg/km           | 4720  |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 370 • 2.2<br># 20: 590 • 3.4<br># 22: 670 • 4.0 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## ААБнлШнг 3х150-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-tape armoured, with low-flammable PVC-compound protection hose

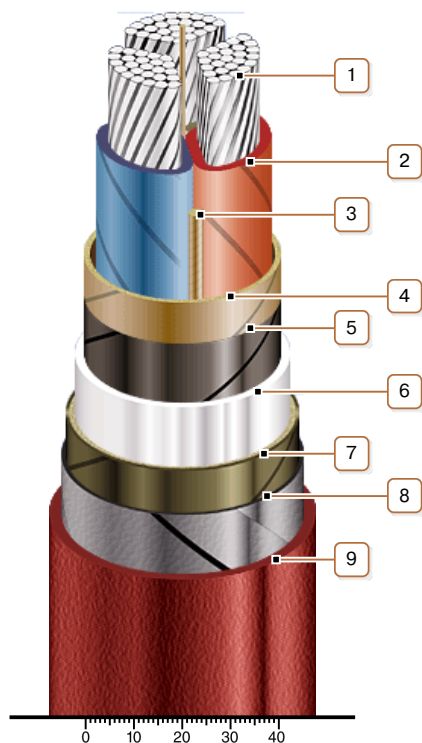

### CONSTRUCTION

1. Aluminium multiwire compacted conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Conducting paper screen
6. Aluminium sheath
7. Plastic-tape and glass-tape bedding
8. Double galvanized steel-tape armour
9. Pressed off low-flammable PVC compound protection hose

*Note: Conductor twisting is not illustrated*