



## ААП2л 3x95(ож)-6 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-wire armoured

Cables are used for laying:

- *in soil (trenches) with medium corrosiveness, as well as with vagabond currents*
- *with a risk of mechanical damage and tensile forces in operation*

### TECHNICAL SPECIFICATIONS


|  |                 |                                     |
|--|-----------------|-------------------------------------|
| Rated voltage  | kV              | 6                                   |
| Number and rated area of conductors                                      | mm <sup>2</sup> | 3 x 95                              |
| Insulation thickness between conductors                                  | mm              | 4                                   |
| Insulation thickness of conductor-sheath                                 | mm              | 2.95                                |
| Sheath thickness   | mm              | 1.4                                 |
| Permissible continuous current rating *                                  |                 |                                     |
| • <i>by aerial laying</i>  | A               | 214                                 |
| • <i>by burial</i>   | A               | 213                                 |
| Operating temperature range  | °C              | -50 ... +50                         |
| Minimum bending radius by laying   | mm              | 1225                                |
| Level difference along the laying rout, not more than                    | m               | 20                                  |
| Metal sheath outer diameter (for reference only)                         | mm              | 32                                  |
| Rated outer diameter of the cable (for reference) **                     | mm              | 49                                  |
| Cable weight (approximate)   | kg/km           | 4170                                |
| Rated factory cable length and gross weight of the delivery on the drums | m, t            | # 16a: 410 • 2.0<br># 18: 460 • 2.4 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*

\* *Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*


\*\* *The external diameter may differ from the rated up to ± 10 %*



## ААП2л 3x95(ож)-6 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, aluminium-sheathed, steel-wire armoured

### CONSTRUCTION

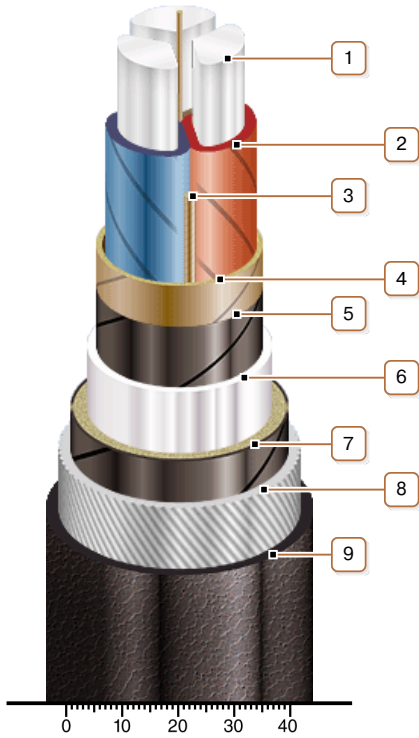

1. Aluminium conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Conducting paper screen
6. Aluminium sheath
7. Double-layer plastic-tape bedding
8. Round galvanized steel-wire armour
9. Outer covering

Note: Conductor twisting is not illustrated