



7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

<mark>ЦАСШнг</mark> 3х95-6 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, lead-sheathed, with low-flammable PVC-compound protection hose

Cables are used for laying:

without level difference limitation

• in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosivenes

• with no risk of mechanical damage in operation

in bunches

Fire safety code in accordance with ACTY 4809:2007: $\Pi E130000000$ Products of this mark meet the requirements:

• single wire cable flame retardance

bunched cable flame retardance category B

TECHNICAL SPECIFICATIONS

Rated voltage	kV	6
Number and rated area of conductors	mm²	3 x 95
Insulation thikness between conductors	mm	4
Insulation thikness of conductor-sheath	mm	2.95
Sheath thikness	mm	1.42
Permissible continious current rating *		
• by aerial laying	А	214
• by burial	А	213
Operating temperature range	°C	-50 +50
Minimum bending radius by laying	mm	615
Metal shaeth outer diameter (for reference only)	mm	34
Rated outer diameter of the cable (for reference) **	mm	41
Cable weight (approximate)	kg/km	3460
Rated factory cable length and gross weight of the delivery	m, t	# 16a: 570 • 2.2
on the drums ***		# 18: 660 • 2.7
Notes		

Notes:

When ordering it is neccesary to agree the factory length of the product with the manufacturer

* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C,

thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

** The external diameter may differ from the rated up to \pm 10 %






7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

ЦАСШнг 3х95-6 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, lead-sheathed, with low-flammable PVC-compound protection hose

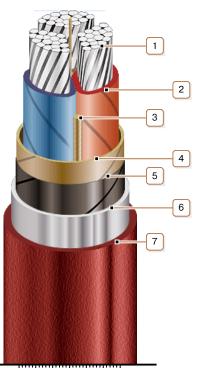

CONSTRUCTION

- 1. Aluminium multiwire compacted conductor
- 2. Impregnated paper insulation
- 3. Cable paper bundle
- 4. Belt insulation
- 5. Conducting paper screen
- 6. Lead sheath
- 7. Pressed off low-flammable PVC compound protection hose

Note: Conductor twisting is not illustrated

0 10 20 30