





7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

ЦАСБГ 3x185(ож)-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, lead-sheathed, steel-tape armoured

Cables are used for laying:

- · without level difference limitation
- in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosivenes
- · in fire-risk premises
- · on technological trestles
- · on special cable bridges
- · with a risk of mechanical damage and no tensile forces in operation

Fire safety code in accordance with ДСТУ 4809:2007: ΠБ100000000

Products of this mark meet the requirements:

· single wire cable flame retardance

TECHNICAL SPECIFICATIONS

Rated voltage	kV	10
Number and rated area of conductors	mm²	3 x 185
Insulation thikness between conductors	mm	5.5
Insulation thikness of conductor-sheath	mm	4
Sheath thikness	mm	1.62
Permissible continious current rating *		
by aerial laying	Α	298
• by burial	Α	275
Operating temperature range	°C	-50 +50
Minimum bending radius by laying	mm	765
Metal shaeth outer diameter (for reference only)	mm	44
Rated outer diameter of the cable (for reference) **	mm	51
Cable weight (approximate)	kg/km	6280
Rated factory cable length and gross weight of the delivery	m, t	# 18: 430 • 3.2
on the drums ***		# 20: 680 • 4.9

Notes

When ordering it is neccesary to agree the factory length of the product with the manufacturer

^{*} Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K • m/W, laying depth in the soil 0.7 m

^{**} The external diameter may differ from the rated up to \pm 10 %








7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830 E-mail: market@yuzhcable.com.ua

ЦАСБГ 3x185(ож)-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, lead-sheathed, steel-tape armoured

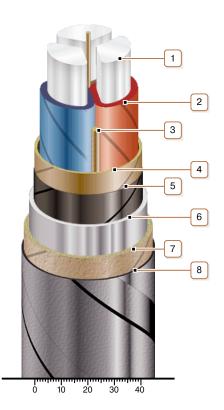

CONSTRUCTION

- 1. Aluminium conductor
- 2. Impregnated paper insulation
- 3. Cable paper bundle
- 4. Belt insulation
- 5. Conducting paper screen
- 6. Lead sheath
- 7. Bedding
- 8. Double galvanized steel-tape armour

Note: Conductor twisting is not illustrated