



## ЦАСБлШВ 3x185-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, lead-sheathed, steel-tape armoured, with PVC-compound protection hose

Cables are used for laying:

- *without level difference limitation*
- *in soil (trenches) with high corrosiveness without vagabond currents*
- *in soil (trenches) with medium corrosiveness, as well as with vagabond currents*
- *in fire-risk premises*
- *on technological trestles*
- *on special cable bridges*
- *in mines, non-hazardous as for gas and dust*
- *with a risk of mechanical damage and no tensile forces in operation*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*

### TECHNICAL SPECIFICATIONS


|  |                 |   |
|--|-----------------|---|
| Rated voltage  | kV              | 10  |
| Number and rated area of conductors                                      | mm <sup>2</sup> | 3 x 185   |
| Insulation thickness between conductors                                  | mm              | 5.5   |
| Insulation thickness of conductor-sheath                                 | mm              | 4   |
| Sheath thickness   | mm              | 1.66  |
| Permissible continuous current rating *                                  |                 |   |
| • <i>by aerial laying</i>  | A               | 298   |
| • <i>by burial</i>   | A               | 275   |
| Operating temperature range  | °C              | -50 ... +50   |
| Minimum bending radius by laying   | mm              | 915   |
| Metal sheath outer diameter (for reference only)                         | mm              | 49  |
| Rated outer diameter of the cable (for reference) **                     | mm              | 61  |
| Cable weight (approximate)   | kg/km           | 7540  |
| Rated factory cable length and gross weight of the delivery on the drums | m, t            | # 18: 270 • 2.5<br># 20: 440 • 4.0<br># 22: 500 • 4.6 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*


*\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*

*\*\* The external diameter may differ from the rated up to ± 10 %*



## ЦАБлШВ 3х185-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, lead-sheathed, steel-tape armoured, with PVC-compound protection hose

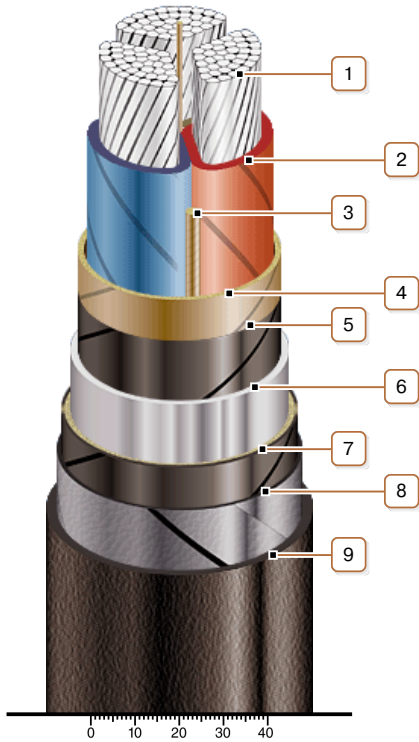

### CONSTRUCTION

1. Aluminium multiwire compacted conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Conducting paper screen
6. Lead sheath
7. Single-layer plastic-tape bedding
8. Double steel-tape armour
9. Pressed PVC compound protection hose

Note: Conductor twisting is not illustrated