



## АСП2лШнг 3х35(ож)-1 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, lead-sheathed, steel-wire armoured, with low-flammable PVC-compound protection hose

Cables are used for laying:

- in soil (trenches) with high corrosiveness, as well as with vagabond currents
- in soil (trenches) with high corrosiveness without vagabond currents
- in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosiveness
- in mines, non-hazardous as for gas and dust
- with a risk of mechanical damage and tensile forces in operation
- in bunches

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- single wire cable flame retardance
- bunched cable flame retardance category A

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                                     |
|------------------------------------------------------------------------------|-----------------|-------------------------------------|
| Rated voltage                                                                | kV              | 1                                   |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 3 x 35                              |
| Insulation thickness between conductors                                      | mm              | 1.5                                 |
| Insulation thickness of conductor-sheath                                     | mm              | 1.25                                |
| Sheath thickness                                                             | mm              | 1.11                                |
| Permissible continuous current rating *                                      |                 |                                     |
| • by aerial laying                                                           | A               | 118                                 |
| • by burial                                                                  | A               | 126                                 |
| Operating temperature range                                                  | °C              | -50 ... +50                         |
| Minimum bending radius by laying                                             | mm              | 510                                 |
| Level difference along the laying route, not more than                       | m               | 25                                  |
| Metal sheath outer diameter (for reference only)                             | mm              | 18                                  |
| Rated outer diameter of the cable (for reference) **                         | mm              | 34                                  |
| Cable weight (approximate)                                                   | kg/km           | 2800                                |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16: 330 • 1.2<br># 16a: 870 • 2.7 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## АСП2лШнг 3х35(ож)-1 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, lead-sheathed, steel-wire armoured, with low-flammable PVC-compound protection hose

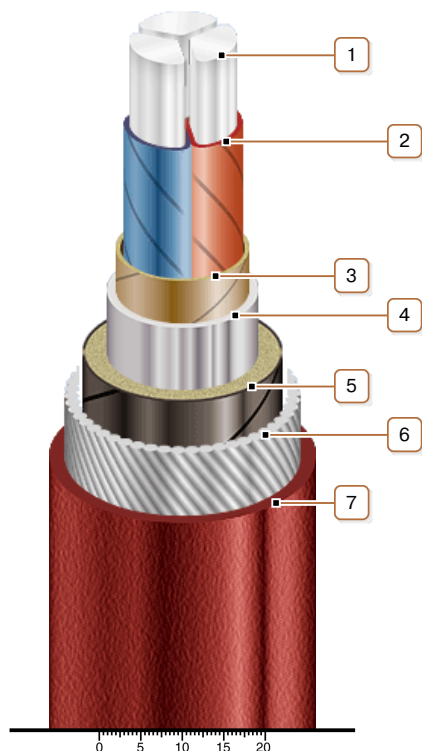

### CONSTRUCTION

1. Aluminium conductor
2. Impregnated paper insulation
3. Belt insulation
4. Lead sheath
5. Double-layer plastic-tape bedding
6. Round galvanized steel-wire armour
7. Pressed off low-flammable PVC compound protection hose

*Note: Conductor twisting is not illustrated*