



## **АВБбШнг 4х120 (ож)-1** **ТУ У 31.3-00214534-018-2003**

Power cables with aluminium conductors, with PVC-compound insulation, galvanized steel-tape armoured, with low-flammable PVC-compound protection hose

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*
- *in places, where small mechanical impacts on cable are possible, including tensile forces*

Manufacturing of cable with multiwire conductors is possible

Manufacturing of cable with PVC compound belt insulation is possible

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

### **TECHNICAL SPECIFICATIONS**


|  |                 |   |
|--|-----------------|---|
| Rated voltage  | kV              | 1   |
| Number and rated area of conductors  | mm <sup>2</sup> | 4 x 120   |
| Phase insulation thickness   | mm              | 1.6   |
| Permissible continuous current rating (AC of industrial frequency) *         |                 |   |
| • <i>by aerial laying</i>  | A               | 212   |
| • <i>by burial</i>   | A               | 226   |
| Maximum permissible conductor temperature                                    |                 |   |
| • <i>Continuous</i>  | °C              | +70   |
| • <i>in emergency operation</i>  | °C              | +90   |
| • <i>at short circuit</i>  | °C              | +160  |
| Operating temperature range  | °C              | -50 ... +50   |
| Minimum bending radius by laying   | mm              | 315   |
| Rated outer diameter of the cable (for reference) **                         | mm              | 42  |
| Cable weight (approximate)   | kg/km           | 2580  |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16a: 570 • 1.7<br># 18: 660 • 2.2<br># 20: 1050 • 3.3 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*


*\* Long permissible current loads are calculated during operation in four-wire networks with load in all the conductors for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*

*\*\* The external diameter may differ from the rated up to ± 10 %*



## **АВБбШнг 4х120 (ож)-1 ТУ У 31.3-00214534-018-2003**

Power cables with aluminium conductors, with PVC-compound insulation, galvanized steel-tape armoured, with low-flammable PVC-compound protection hose

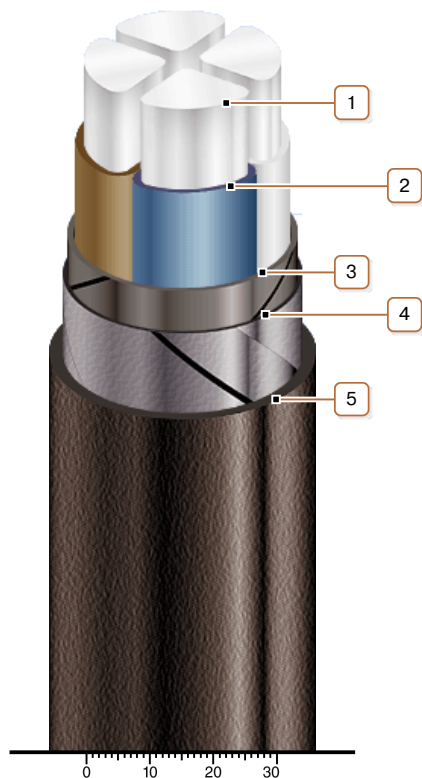

### **CONSTRUCTION**

1. Aluminium conductor
2. PVC compound insulation
3. Tape core wrapping
4. Double galvanized steel-tape armour
5. Pressed off low-flammable PVC compound protection hose

*Note: Conductor twisting is not illustrated*