



АВББШнг 1х120-3 ТУ У 31.3-00214534-018-2003

Power cables with aluminium conductors, with PVC-compound insulation, galvanized steel-tape armoured, with low-flammable PVC-compound protection hose

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*
- *in places, where small mechanical impacts on cable are possible, including tensile forces*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

TECHNICAL SPECIFICATIONS

| | | |
|--|-----------------|-----------------|
| Rated voltage | kV | 3 |
| Number and rated area of conductors | mm ² | 1 x 120 |
| Phase insulation thickness | mm | 2.2 |
| Permissible continious current rating (AC of industrial frequency) * | | |
| • <i>by aerial laying</i> | A | 253 |
| • <i>by burial</i> | A | 252 |
| Permissible continious current rating (DC) * | | |
| • <i>by aerial laying</i> | A | 320 |
| • <i>by burial</i> | A | 388 |
| Maximum permissible conductor temperature | | |
| • <i>Continious</i> | °C | +70 |
| • <i>in emergency operation</i> | °C | +90 |
| • <i>at short circuit</i> | °C | +160 |
| Operating temperature range | °C | -50 ... +50 |
| Minimum bending radius by laying | mm | 270 |
| Rated outer diameter of the cable (for reference) ** | mm | 27 |
| Cable weight (approximate) | kg/km | 1160 |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t | # 14: 800 • 1.1 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

** The external diameter may differ from the rated up to ± 10 %



АВББШнг 1х120-3 **ТУ У 31.3-00214534-018-2003**

Power cables with aluminium conductors, with PVC-compound insulation, galvanized steel-tape armoured, with low-flammable PVC-compound protection hose

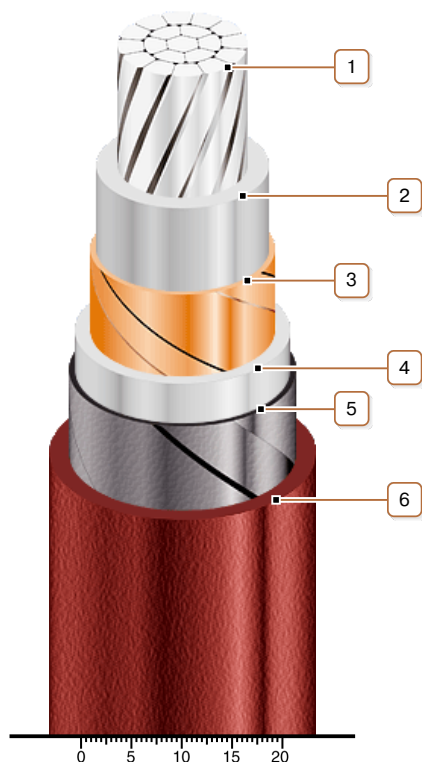

CONSTRUCTION

1. *Aluminium multiwire compacted conductor*
2. *PVC compound insulation*
3. *Copper screen*
4. *PVC compound belt insulation*
5. *Double galvanized steel-tape armour*
6. *Pressed off low-flammable PVC compound protection hose*