

## АВВГнг 3х150 (ож)-1 ТУ У 31.3-00214534-018-2003

Power cables with aluminium conductors, with PVC-compound insulation, with low-flammable PVC-compound outer sheath

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*

Manufacturing of cable with multiwire conductors is possible

Manufacturing of cable with PVC compound belt insulation is possible

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

### TECHNICAL SPECIFICATIONS

|  |                 |                                     |
|--|-----------------|-------------------------------------|
| Rated voltage  | kV              | 1                                   |
| Number and rated area of conductors  | mm <sup>2</sup> | 3 x 150                             |
| Phase insulation thickness   | mm              | 1.8                                 |
| Permissible continuous current rating (AC of industrial frequency) *         |                 |                                     |
| • <i>by aerial laying</i>  | A               | 261                                 |
| • <i>by burial</i>   | A               | 274                                 |
| Maximum permissible conductor temperature                                    |                 |                                     |
| • <i>Continuous</i>  | °C              | +70                                 |
| • <i>in emergency operation</i>  | °C              | +90                                 |
| • <i>at short circuit</i>  | °C              | +160                                |
| Operating temperature range  | °C              | -50 ... +50                         |
| Minimum bending radius by laying   | mm              | 277.5                               |
| Rated outer diameter of the cable (for reference) **                         | mm              | 37                                  |
| Cable weight (approximate)   | kg/km           | 1860                                |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16a: 700 • 1.6<br># 18: 800 • 1.9 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## **АВВГнг 3х150 (ож)-1** **ТУ У 31.3-00214534-018-2003**

Power cables with aluminium conductors, with PVC-compound insulation, with low-flammable PVC-compound outer sheath

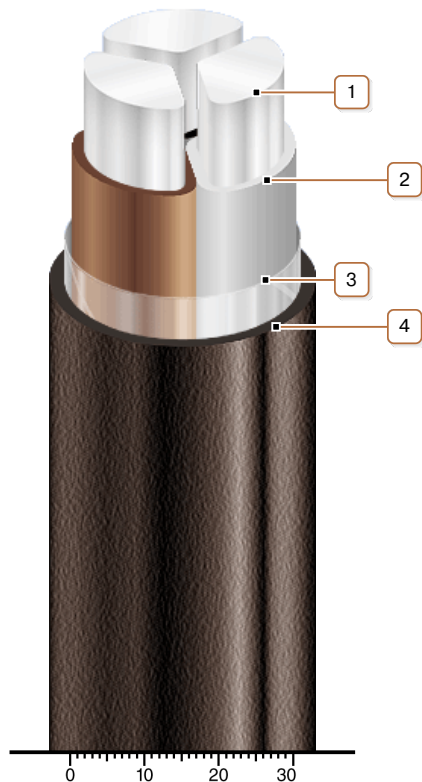

### **CONSTRUCTION**

1. Aluminium conductor
2. PVC compound insulation
3. PET film winding
4. Low flammable PVC compound outer sheath

*Note: Conductor twisting is not illustrated*