



## ПВГГГ 1x150-1 ТУ У 31.3-00214534-018-2003

Power cables with copper conductors, XLPE-insulated, with low-flammable PVC-compound outer sheath

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

### TECHNICAL SPECIFICATIONS


|  |                 |                  |
|--|-----------------|------------------|
| Rated voltage  | kV              | 1                |
| Number and rated area of conductors                                      | mm <sup>2</sup> | 1 x 150          |
| Phase insulation thickness   | mm              | 1.4              |
| Permissible continuous current rating (AC of industrial frequency) *     |                 |                  |
| • <i>by aerial laying</i>  | A               | 464              |
| • <i>by burial</i>   | A               | 392              |
| Permissible continuous current rating (DC) *                             |                 |                  |
| • <i>by aerial laying</i>  | A               | 591              |
| • <i>by burial</i>   | A               | 614              |
| Maximum permissible conductor temperature                                |                 |                  |
| • <i>Continuous</i>  | °C              | +90              |
| • <i>in emergency operation</i>  | °C              | +130             |
| • <i>at short circuit</i>  | °C              | +250             |
| Operating temperature range  | °C              | -50 ... +50      |
| Minimum bending radius by laying   | mm              | 220              |
| Rated outer diameter of the cable (for reference) **                     | mm              | 22               |
| Cable weight (approximate)   | kg/km           | 1540             |
| Rated factory cable length and gross weight of the delivery on the drums | m, t            | # 14: 1300 · 2.2 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*


\* *Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*

\*\* *The external diameter may differ from the rated up to ± 10 %*



**ПВГГГ 1x150-1**  
**ТУ У 31.3-00214534-018-2003**

Power cables with copper conductors, XLPE-insulated, with low-flammable PVC-compound outer sheath

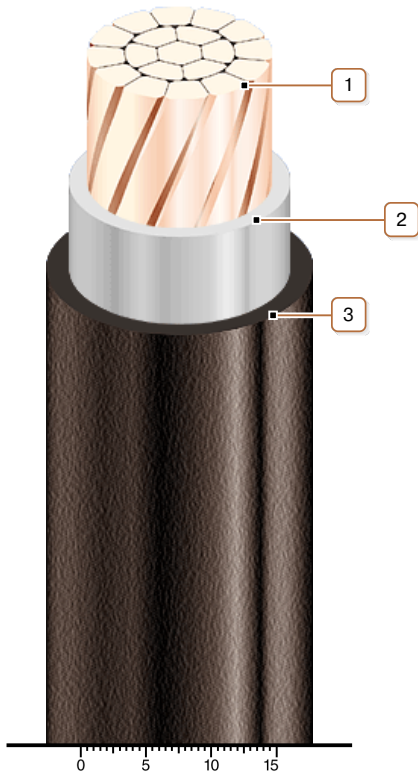

### CONSTRUCTION

1. *Copper multiwire compact conductor*
2. *XLPE insulation*
3. *Low flammable PVC compound outer sheath*