



## ПвПГнг-НФ 1х6-1 ТУ У 31.3-00214534-069:2011

Power cables with copper conductors, XLPE-insulated, with polymer compound outer sheath, flame-retardant, halogen-free

Cables are used for laying:

- *power supply cable lines of NPP electric equipment, wiring in office premises, which are computerized and intelligent, in kindergartens, schools, hospitals and for cable lines of spectating complexes and sport structures*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ123122000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*
- *toxicity class Tk3 of the combustion products of nonmetallic elements (toxicity index over 120 g/m<sup>3</sup>)*
- *class ДТк1 on smoke-forming ability by smouldering of non-metallic elements (coefficient of smoke formation from 50 to 500 m<sup>2</sup>/kg)*
- *class ДПк2 on smoke-forming ability by combustion (minimum luminous flux more than 60 %)*
- *corrosive class Кк2 of combustion products of non-metallic elements (the number of halogen hydrides less than 150 mg/g, pH more than 4.3, specific conductivity less than 10 μS/mm)*

### TECHNICAL SPECIFICATIONS

|  |                 |             |
|--|-----------------|-------------|
| Rated voltage  | kV              | 1           |
| Number and rated area of conductors                                  | mm <sup>2</sup> | 1 x 6       |
| Phase insulation thickness   | mm              | 0.7         |
| Permissible continuous current rating (AC of industrial frequency) * |                 |             |
| • <i>by aerial laying</i>  | A               | 59          |
| Permissible continuous current rating (DC) *                         |                 |             |
| • <i>by aerial laying</i>  | A               | 76          |
| Maximum permissible conductor temperature                            |                 |             |
| • <i>Continuous</i>  | °C              | +90         |
| • <i>in emergency operation</i>                                      | °C              | +130        |
| • <i>at short circuit</i>  | °C              | +250        |
| Operating temperature range  | °C              | -50 ... +50 |
| Minimum bending radius by laying                                     | mm              | 100         |
| Rated outer diameter of the cable (for reference) **                 | mm              | 10          |
| Cable weight (approximate)   | kg/km           | 140         |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## ПвПГнг-НФ 1х6-1 ТУ У 31.3-00214534-069:2011

Power cables with copper conductors, XLPE-insulated, with polymer compound outer sheath, flame-retardant, halogen-free

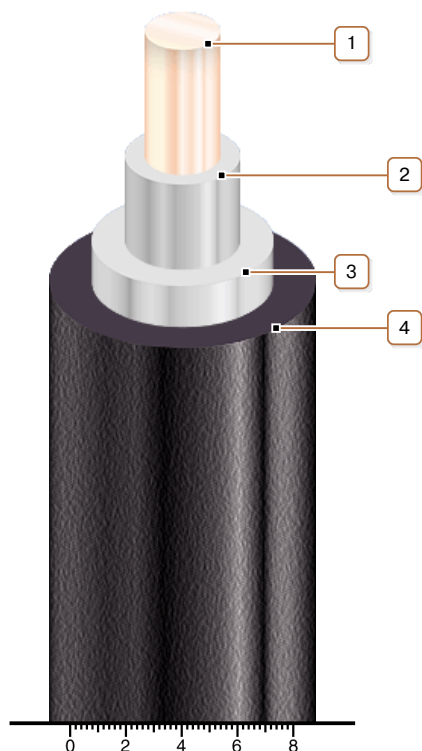

### CONSTRUCTION

1. Copper conductor
2. XLPE insulation
3. Halogen-free polymer compound inner sheath
4. Polymer compound outer sheath: flame-retardant and halogen-free