

7, Autogennaya Str., Kharkov, 61099, Ukraine. Phone: (+38-057) 728-1244, 728-1241. Fax: (+38-057) 728-1243, (+38-0572) 946-830  
 E-mail: market@yuzhcable.com.ua

## СІПн-1 3x120+1x95+1x25 ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013

Self-supporting flame-retardant wires with polymer compound insulation, with neutral carrier non-insulated conductor

Used for laying:

- trunks of aerial electric power lines and line branches for the rated voltage of 0.6/1 kV
- in air, types I and II according to ГОСТ 15150-69

It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- single wire cable flame retardance

### TECHNICAL SPECIFICATIONS

|  |                 |                                    |
|--|-----------------|------------------------------------|
| Rated voltage  | kV              | 0.6 / 1                            |
| Number and rated area of phase conductors                                    | mm <sup>2</sup> | 3 x 120                            |
| Number and rated area of additional conductors for light circuits            | mm <sup>2</sup> | 1 x 25                             |
| Carrier neutral conductor rated area   | mm <sup>2</sup> | 95                                 |
| Phase insulation thickness   | mm              | 1.7                                |
| Current ratings *  |                 |                                    |
| • <i>Continious</i>  | A               | 340                                |
| • <i>at short circuit (not more than 1 s)</i>                                | kA              | 10.9                               |
| Maximum permissible conductor temperature                                    | °C              | +90                                |
| • <i>Continious</i>  | °C              | +250                               |
| Operating temperature range  | °C              | -60 ... +50                        |
| Permissible temperature of laying (installation), no less than               | °C              | -20                                |
| Minimum bending radius by laying   | mm              | 443                                |
| Rated outer diameter of the cable (for reference) **                         | mm              | 44.3                               |
| Weight (approximate)   | kg/km           | 1530                               |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 600 • 1.4<br># 20: 960 • 2.1 |

Notes:


When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: ambient temperature plus 25 °C, wind speed 0.6 m/s, the intensity of solar radiation 1000 W/m<sup>2</sup>

\*\* The external diameter may differ from the rated up to ± 10 %




200202-013120125950



**СІПн-1 3x120+1x95+1x25**  
**ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013**

Self-supporting flame-retardant wires with polymer compound insulation, with neutral carrier non-insulated conductor

## CONSTRUCTION

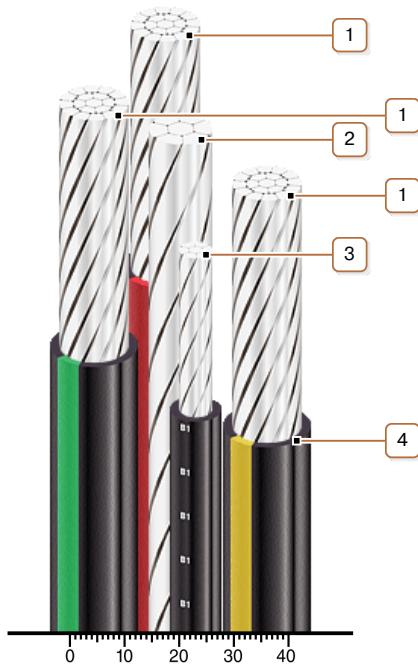

**1. Aluminium multiwire compacted conductor**

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

**2. Multiwire aluminium-alloy compacted supporting conductor**

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

**3. Multiwire compacted aluminium assisting conductor for light circuits**

**4. Flame-retardant polymer compound insulation**

*Note: Wire lay-up is not illustrated.*