



## **NYM-O 4x35** **DIN VDE 0250-204**

Power cables with copper conductors, PVC compound insulation, outer PVC compound sheath

Cable technical specifications conform DIN VDE 0250 p.204

Cables are used for:

- *electric wiring and cable lines installation in industrial, residential and public buildings and facilities*
- *laying over the plaster, inside and under plaster, in brick masonry and concrete, in pipes and ducts*
- *outdoor installation, if protected from sun rays*

Manufacturing of cables with light-stabilized outer sheath is possible

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*

### **TECHNICAL SPECIFICATIONS**


Rated voltage	kV	0.66
Number and rated area of conductors	mm <sup>2</sup>	4 x 35
Insulation thickness	mm	1.2
Permissible continuous current rating *		
• <i>by aerial laying (AC of industrial frequency) *</i>	A	127
Operating temperature range	°C	-50 ... +50
Minimum bending radius by laying	mm	120
Rated outer diameter of the cable (for reference) **	mm	30
Cable weight (approximate)	kg/km	2150
Rated factory cable length and gross weight of the delivery on the drums	m, t	# 14: 700 • 1.7 # 16a: 1120 • 2.7

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*


*\* Long permissible current loads are calculated for the during operation in four-wire networks with load in all the conductors at the air temperature plus 25 °C*

*\*\* The external diameter may differ from the rated up to ± 10 %*



## **NYM-O 4x35 DIN VDE 0250-204**

Power cables with copper conductors, PVC compound insulation, outer PVC compound sheath

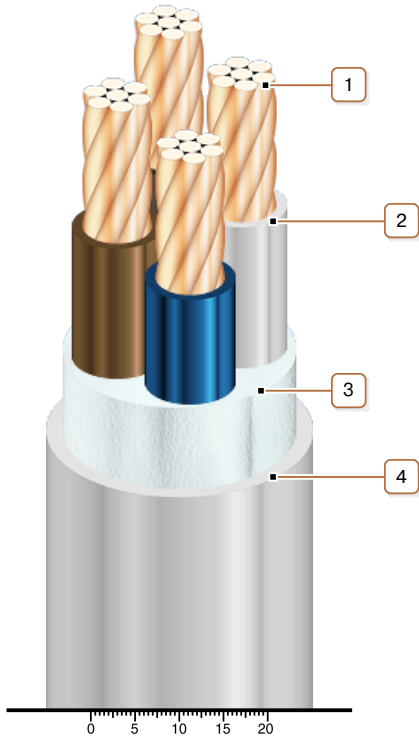

### **CONSTRUCTION**

1. Copper multiwire conductor
2. PVC compound insulation
3. Extruded uncured stock inner sheath
4. PVC compound outer sheath

*Note: Manufacturing of cables with light-stabilized outer sheath is possible*

*Note: Conductor twisting is not illustrated*