



ПВВПнгд 3 x 1.5 ТУ У 31.3-00214534-059:2008

Connecting flat wires with copper conductors, low fire-risk PVC compound insulation, low fire-risk PVC compound outer sheath

Used for:

- *laying in dry and damp areas, for installation in switchboards, in ducts, for concealed and open wiring on the walls, in the networks for AC voltage up to 380 V (for systems up to 380/660 V)*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ123121000

Products of this mark meet the requirements:


- *single wire cable flame retardance*
- *bunched cable flame retardance category A*
- *toxicity class Tk3 of the combustion products of nonmetallic elements (toxicity index over 120 g/m³)*
- *class ДТк1 on smoke-forming ability by smouldering of non-metallic elements (coefficient of smoke formation from 50 to 500 m²/kg)*
- *class ДПк2 on smoke-forming ability by combustion (minimum luminous flux more than 60 %)*
- *corrosive class Кк1 of combustion products of non-metallic elements (the number of halogen hydrides less than 150 mg/g, pH less than 4.3, specific conductivity more than 10 μS/mm)*

TECHNICAL SPECIFICATIONS

| | | |
|---|-----------------|-------------|
| Rated voltage | kV | 0.38 |
| Number and rated area of conductors | mm ² | 3 x 1.5 |
| Insulation thickness | mm | 0.6 |
| Permissible continuous current by aerial laying | A | 16 |
| Operating temperature range | °C | -15 ... +50 |
| Flexibility class acc. to ГОСТ 22483-77 | | 1 |
| Minimum bending radius by laying | mm | 47 |
| Width and thickness (rated, for reference only) | mm | 9.4 x 4.3 |
| Weight (approximate) | kg/km | 91 |


Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer



ПВВПнгд 3 x 1.5 ТУ У 31.3-00214534-059:2008

Connecting flat wires with copper conductors, low fire-risk PVC compound insulation, low fire-risk PVC compound outer sheath

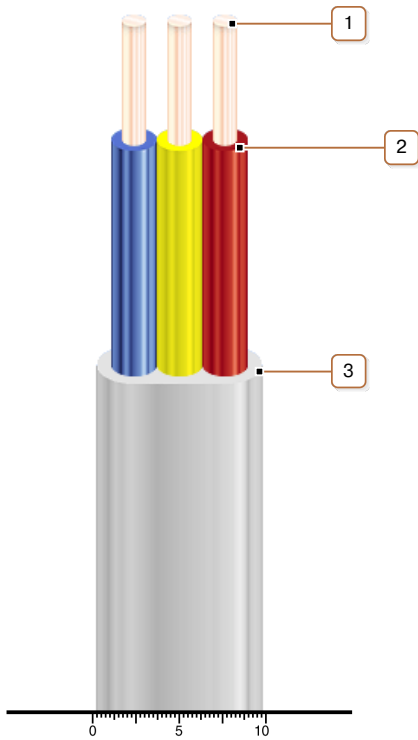

CONSTRUCTION

1. Copper conductor
2. Low fire-risk PVC compound insulation
3. Low fire-risk PVC compound outer sheath