



## **ПНПнгд 3 x 1.5 ТУ У 31.3-00214534-059:2008**

Connecting flat household wires with copper conductors, low fire-risk PVC compound insulation, low fire-risk PVC compound outer sheath

Used for:

- *laying in lighting networks for AC voltage up to 250 V, including on the wooden constructions*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ123121000

Products of this mark meet the requirements:


- *single wire cable flame retardance*
- *bunched cable flame retardance category A*
- *toxicity class Tk3 of the combustion products of nonmetallic elements (toxicity index over 120 g/m<sup>3</sup>)*
- *class ДТк1 on smoke-forming ability by smouldering of non-metallic elements (coefficient of smoke formation from 50 to 500 m<sup>2</sup>/kg)*
- *class ДПк2 on smoke-forming ability by combustion (minimum luminous flux more than 60 %)*
- *corrosive class Kк1 of combustion products of non-metallic elements (the number of halogen hydrides less than 150 mg/g, pH less than 4.3, specific conductivity more than 10 μS/mm)*

### **TECHNICAL SPECIFICATIONS**

Rated voltage	kV	0.38
Number and rated area of conductors	mm <sup>2</sup>	3 x 1.5
Insulation thickness	mm	0.5
Permissible continuous current by aerial laying	A	11
Operating temperature range	°C	-15 ... +50
Flexibility class acc. to ГОСТ 22483-77		1
Minimum bending radius by laying	mm	41
Width and thickness (rated, for reference only)	mm	8.2 x 3.5
Weight (approximate)	kg/km	78


Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*



**ПНПнгд 3 x 1.5**  
**ТУ У 31.3-00214534-059:2008**

Connecting flat household wires with copper conductors, low fire-risk PVC compound insulation, low fire-risk PVC compound outer sheath

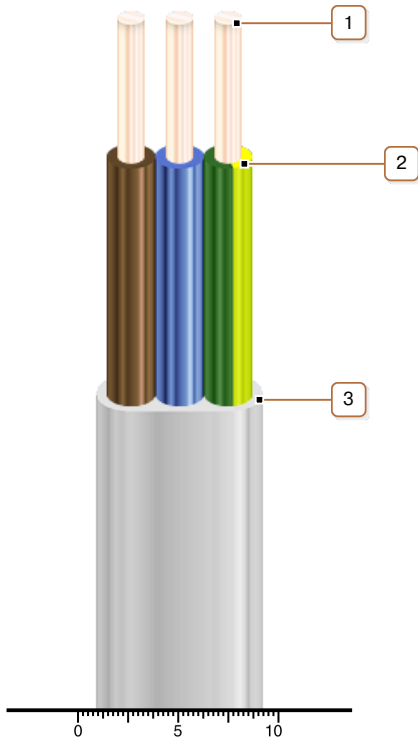

**CONSTRUCTION**

- 
1. *Copper conductor*
  2. *Low fire-risk PVC compound insulation*
  3. *Low fire-risk PVC compound outer sheath*
-