



## ОПТ \* 8 – 8 TY Y 31.3-00214534-047:2005

Fiber optic overhead module-core cables, with polyethylene outer sheath

---

### Mark formation:

ОПТ-[a]-[b] [c]8(8x[e])-8

[a] central strength element

- C – steel
- No marks – dielectric

[b] quantity of optical fibers in the cable, possible values

- 32, 48, 64, 80, 96, 104, 112, 120, 128

[c] type of optical fiber

- E – single-mode (ITU-T G.652B)
- A – single-mode with extended wavelength band (ITU-T G.652D, ITU-T G.657A1)
- C – single-mode with non-zero shifted dispersion (ITU-T G.655)
- M – multimode with core and sheath diameter ratio 50 : 125 mm (ITU-T G.651)
- B – multimode with core and sheath diameter ratio 62.5 : 125 mm (IEC 60793-2)

[e] quantity of optical fibers in the module:

- 1 ... 16
- 

Manufacturing of cables in climate version F is possible

Manufacturing of cables with steel strength element is possible

Manufacturing of cables with armouring (aramid yarns and/or corrugated steel tape) is possible

Manufacturing of cables with steel or dielectric wire rope (glass fiber rod) is possible

Manufacturing of cables with flame-retardant polymer compound outer sheath is possible

It is possible to manufacture cables with gel-filled core or dry core (with water-blocking yarns and tapes)

It is possible to manufacture cables with a number of core elements up to and including 18

---

Order placing: sample of indication (corresponds to configuration pattern)

ОПТ-80A8(8x10)-8 • TY Y 31.3-00214534-047:2005

---

Cables are used for:

- suspensions and operation at supports of aerial contact-lines, urban electric transport and aerial power transmission lines under impact of wind, ice or their combination loads



**ОПТ \* 8 – 8**  
**ТУ У 31.3-00214534-047:2005**

Fiber optic overhead module-core cables, with polyethylene outer sheath

**TECHNICAL SPECIFICATIONS**


|  |           |                                       |
|--|-----------|---------------------------------------|
| Number of cable core elements  | units     | 8                                     |
| Number of optical fibers in cable  | units     | 32 ... 128                            |
| Electrical resistance of sheath insulation, not less than                                  | MOhm · km | 2000                                  |
| Permissible tensile force  | kN        | 8                                     |
| Permissible crushing force, no less than   | N/10 sm   | 3000                                  |
| Operating temperature range  | °C        | -40 ... +60                           |
| Operating temperature range (in climate version F)   | °C        | -60 ... +60                           |
| Cable weight (approximate, depending on construction)                                      | kg/km     | 200 ... 230                           |
| Rated outer diameter of the cable (for reference only, depending on construction) **       | mm        | 12 ... 13                             |
| Cable width with suspension element (for reference only, depending on construction design) | mm        | 21 ... 23                             |
| Minimum bending radius during laying   | mm        | 260                                   |
| Rated factory cable length and gross weight of the delivery on the drums                   | m, t      | # 12a: 2740 · 0.7<br># 14: 3720 · 0.9 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

\*\* The external diameter may differ from the rated up to  $\pm 10\%$

**CONSTRUCTION**

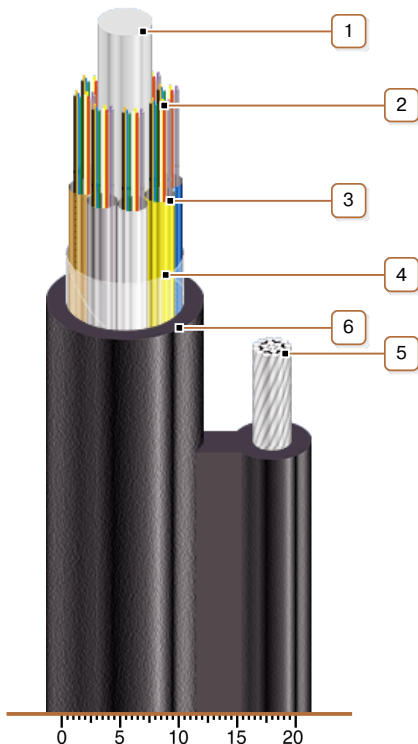

**1. Central dielectric strength element**

Note: Manufacturing of cables with steel strength element is possible

**2. Optic fibers**

**3. Tube of fiber optic module**

**4. PET film winding**

**5. Extended strength member (rope)**

Note: Manufacturing of cables with steel or dielectric wire rope (glass fiber rod) is possible

**6. Polyethylene outer sheath**

Note: Manufacturing of cables with flame-retardant polymer compound outer sheath is possible

Notes:

- Optical module twisting is not illustrated.
- Manufacturing of cables with armoring (aramid yarns and/or corrugated steel tape) is possible
- It is possible to manufacture cables with gel-filled core or dry core (with water-blocking yarns and tapes)
- It is possible to manufacture cables with a number of core elements up to and including 18