

## Micro Tube 12 \* (1x12)-0.4 TY Y 27.3-00214534-116:2019

Fiber optic distribution cables of micro-tube construction with HDPE sheath

### Mark formation:

Micro Tube 12[c](1x12)-0.4

[c] type of optical fiber

- A – *single-mode with extended wavelength band (ITU-T G.652D, ITU-T G.657A1)*
- D – *single-mode, not sensitive to losses on macro-bending (ITU-T G.657A2)*

Order placing: sample of indication

Micro Tube 12A(1x12)-0.4

Cable construction provides fast access to micro-tubes and fibres (no tools required), minimum of sealing compound and avoiding the risk of micro-tube kinking

Cables are used for:

- *for digital signal transmission in optic local networks as distribution cables*
- *for compact outdoor installation in PE ducts by pulling or floating techniques*


### TECHNICAL SPECIFICATIONS

Number of optical micro-tube in cable		1
Number of optical fibers in cable	units	12
Permissible tensile force (short-term)	N	400
Permissible tensile force (continuous)	N	200
Permissible crushing force, no less than	N/10 sm	1500
Ambient temperature		
• <i>during operation</i>	°C	-30 ... +70
• <i>during storage and transportation</i>	°C	-30 ... +70
• <i>during laying and installation</i>	°C	-10 ... +40
Cable weight (approximate)	kg/km	25
Rated outer diameter of the cable (for reference) **	mm	6.1
Minimum bending radius during laying	mm	122
Minimum bending radius during operation	mm	61

Notes:


When ordering it is necessary to agree the factory length of the product with the manufacturer

\*\* The external diameter may differ from the rated up to  $\pm 10\%$



## **Micro Tube 12 \* (1x12)-0.4** **TY Y 27.3-00214534-116:2019**

Fiber optic distribution cables of micro-tube construction with HDPE sheath

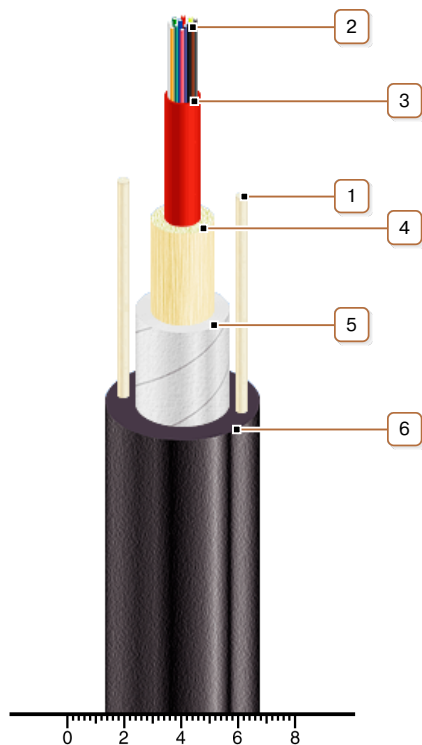

### **CONSTRUCTION**

1. Fiberglass rod in sheath
2. Optic fibers
3. Tube of fiber optic micromodule
4. Aramid-thread or glass-thread layer
5. Lapping layer of water-blocking tape
6. HDPE outer sheath