



## **ПвЭоПл(к)-35 3x120 ТУ У 31.3-00214534-017-2003**

Three-core power cables with copper conductors, with XLPE, collective screen and strengthened polyethylene outer sheath

---

Technical cable requirements correspond to IEC 60502-2

Cables are used for laying:

- *in soil (trenches)*
- *on difficult route sections, according to the unique specification*
- *in the air, including cable structures, if provided the additional fire protection*

---

It is possible to manufacture cables with extruded semiconductor layer along outer sheath.

Order entry example:

ПвЭоПл(к)-П-35 3x120/50 ТУ У 31.3-00214534-017-2003

An extruded semiconductor layer along outer sheath ensures the correct testing of cable line with sections of underground laying in polymer pipes.

---

It is possible to manufacture cables with an integrated fiber-optic module.

Order entry example:

ПвЭоПл(к)-35 3x120/50 (ОМ) ТУ У 31.3-00214534-017-2003

In conjunction with the DTS system, the integrated fiber-optic module can act as a distributed cable line temperature sensor.

---

It is possible to manufacture cable with sealed conductors.

Order entry example:

ПвЭоПл(к)-35 3x120/50 (г) ТУ У 31.3-00214534-017-2003

---



## ПвЭоПу(к)-35 3x120 ТУ У 31.3-00214534-017-2003

Three-core power cables with copper conductors, with XLPE, collective screen and strengthened polyethylene outer sheath

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                                                                            |
|------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------|
| Rated voltage                                                                | kV              | 35                                                                         |
| Maximum voltage                                                              | kV              | 42                                                                         |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 3 x 120                                                                    |
| Insulation thickness                                                         | mm              | 8.6                                                                        |
| Minimum screen cross-section                                                 | mm <sup>2</sup> | 50                                                                         |
| Permissible short circuit current across the screen of minimum cross-section | kA              | 10.2                                                                       |
| Maximum permissible short-circuit current in core                            | kA              | 17.2                                                                       |
| Permissible continuous current rating *                                      |                 |                                                                            |
| • by aerial laying                                                           | A               | 351                                                                        |
| • by burial                                                                  | A               | 298                                                                        |
| Partial discharge factor for rated voltage, not more than                    | pC              | 6                                                                          |
| Maximum permissible conductor temperature                                    |                 |                                                                            |
| • Continuous                                                                 | °C              | +90                                                                        |
| • in emergency operation                                                     | °C              | +130                                                                       |
| • at short circuit                                                           | °C              | +250                                                                       |
| Operating temperature range                                                  | °C              | -60 ... +50                                                                |
| Minimum bending radius by laying                                             | mm              | 1312                                                                       |
| Rated outer diameter of the cable (for reference) **                         | mm              | 82                                                                         |
| Cable weight (approximate)                                                   | kg/km           | 9570                                                                       |
| Rated factory cable length and gross weight of the delivery on the drums     | m, t            | # 25УД-90: 420 • 5.6<br># 26УД-100: 631 • 7.9<br># 30УД-130: ***747 • 10.0 |

#### Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated for the following conditions: conductor temperature 90 °C, air temperature 30 °C, soil temperature 20 °C, load factor 1.0, thermal resistivity of soil 1.5 °K·m/W, laying depth in the ground 0.8 m, shields are grounded at both ends of the line


\*\* The external diameter may differ from the rated up to ± 10 %

\*\*\* Option delivery on not full drum



## ПвЭоПу(к)-35 3x120 ТУ У 31.3-00214534-017-2003

Three-core power cables with copper conductors, with XLPE, collective screen and strengthened polyethylene outer sheath

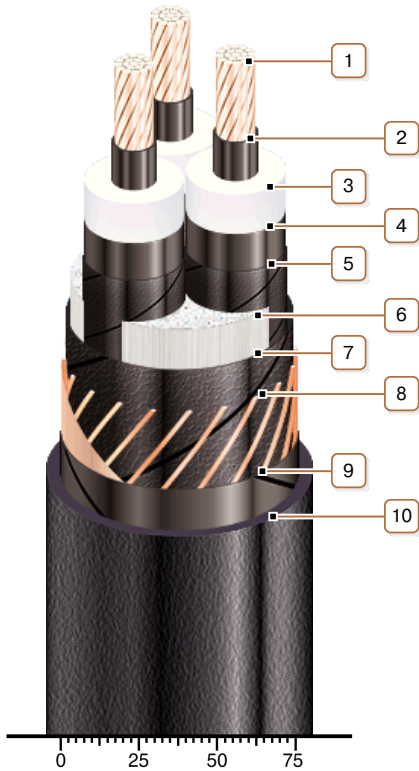

### CONSTRUCTION

**1. Copper multiwire compact conductor**

*Note: It is possible to manufacture cable with sealed conductors.*

**2. Inner extruded semiconducting layer**

**3. XLPE insulation**

**4. Outer extruded semiconducting layer**

**5. Lapping layer of semiconductive swellable tape**

**6. Interstitial filler with polypropylene bundles**

**7. Lapping layer of semiconductive swellable tape**

**8. Copper screen**

**9. Lapping layer of synthetic paper**

**10. Strengthened polyethylene outer sheath**

*Note: It is possible to manufacture cable with extruded semiconductor layer along outer sheath*

*Note: Conductor twisting is not illustrated*