



## ЦАБнлШнг 3х50(ож)-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, aluminium-sheathed, steel-tape armoured, with low-flammable PVC-compound protection hose

Cables are used for laying:

- *without level difference limitation*
- *in fire-risk premises*
- *on technological trestles*
- *with a risk of mechanical damage and no tensile forces in operation*
- *in bunches*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                                     |
|------------------------------------------------------------------------------|-----------------|-------------------------------------|
| Rated voltage                                                                | kV              | 10                                  |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 3 x 50                              |
| Insulation thickness between conductors                                      | mm              | 5.5                                 |
| Insulation thickness of conductor-sheath                                     | mm              | 4                                   |
| Sheath thickness                                                             | mm              | 1.35                                |
| Permissible continious current rating *                                      |                 |                                     |
| • <i>by aerial laying</i>                                                    | A               | 132                                 |
| • <i>by burial</i>                                                           | A               | 134                                 |
| Operating temperature range                                                  | °C              | -50 ... +50                         |
| Minimum bending radius by laying                                             | mm              | 1075                                |
| Metal shaeth outer diameter (for reference only)                             | mm              | 30                                  |
| Rated outer diameter of the cable (for reference) **                         | mm              | 43                                  |
| Cable weight (approximate)                                                   | kg/km           | 2690                                |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16a: 520 • 1.7<br># 18: 600 • 2.1 |

Notes:

*When ordering it is neccesary to agree the factory length of the product with the manufacturer*

\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m


\*\* The external diameter may differ from the rated up to ± 10 %



## ЦАБнлШнг 3х50(ож)-10 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with non-draining impregnated paper insulation, aluminium-sheathed, steel-tape armoured, with low-flammable PVC-compound protection hose

### CONSTRUCTION

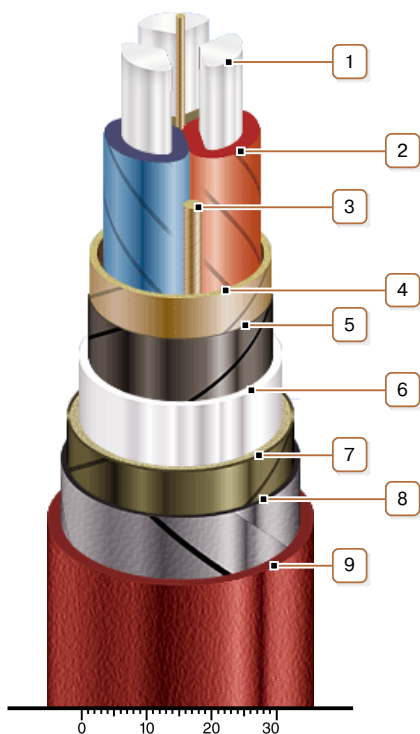

1. Aluminium conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Conducting paper screen
6. Aluminium sheath
7. Plastic-tape and glass-tape bedding
8. Double galvanized steel-tape armour
9. Pressed off low-flammable PVC compound protection hose

*Note: Conductor twisting is not illustrated*