

## АСГ 4x150-1 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, lead-sheathed

Cables are used for laying:

- *in blocks*
- *with no risk of mechanical damage in operation*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ1000000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*

### TECHNICAL SPECIFICATIONS


|  |                 |                 |
|--|-----------------|-----------------|
| Rated voltage  | kV              | 1               |
| Number and rated area of conductors  | mm <sup>2</sup> | 4 x 150         |
| Insulation thickness between conductors                                      | mm              | 1.7             |
| Insulation thickness of conductor-sheath                                     | mm              | 1.45            |
| Sheath thickness   | mm              | 2.03            |
| Permissible continious current rating *                                      |                 |                 |
| • <i>by aerial laying</i>  | A               | 279             |
| • <i>by burial</i>   | A               | 261             |
| Operating temperature range  | °C              | -50 ... +50     |
| Minimum bending radius by laying   | mm              | 630             |
| Level difference along the laying rout, not more than                        | m               | 20              |
| Metal shaeth outer diameter (for reference only)                             | mm              | 40              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 42              |
| Cable weight (approximate)   | kg/km           | 4940            |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 660 • 3.7 |

Notes:

*When ordering it is neccesary to agree the factory length of the product with the manufacturer*


*\* Long permissible current loads are calculated during operation in four-wire networks with load in all the conductors for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*

*\*\* The external diameter may differ from the rated up to ± 10 %*



## АСГ 4x150-1 ТУ У 27.3-00214534-091:2017

Power cables with aluminium conductors, with impregnated paper insulation, lead-sheathed

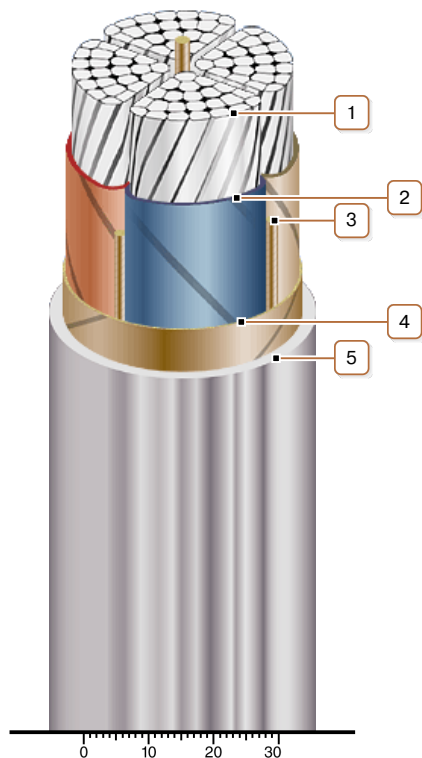

### CONSTRUCTION

1. *Aluminium multiwire compacted conductor*
2. *Impregnated paper insulation*
3. *Cable paper bundle*
4. *Belt insulation*
5. *Lead sheath*

*Note: Conductor twisting is not illustrated*