



СБнлШнг 3x240-1 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured, with low-flammable PVC-compound protection hose

Cables are used for laying:

- *in fire-risk premises*
- *on special cable bridges*
- *with a risk of mechanical damage and no tensile forces in operation*
- *in bunches*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

TECHNICAL SPECIFICATIONS

| | | |
|--|-----------------|-----------------|
| Rated voltage | kV | 1 |
| Number and rated area of conductors | mm ² | 3 x 240 |
| Insulation thickness between conductors | mm | 1.9 |
| Insulation thickness of conductor-sheath | mm | 1.55 |
| Sheath thickness | mm | 1.56 |
| Permissible continuous current rating * | | |
| • <i>by aerial laying</i> | A | 522 |
| • <i>by burial</i> | A | 455 |
| Operating temperature range | °C | -50 ... +50 |
| Minimum bending radius by laying | mm | 810 |
| Level difference along the laying rout, not more than | m | 20 |
| Metal sheath outer diameter (for reference only) | mm | 43 |
| Rated outer diameter of the cable (for reference) ** | mm | 54 |
| Cable weight (approximate) | kg/km | 11270 |
| Rated factory cable length and gross weight of the delivery on the drums | m, t | # 18: 400 • 5.0 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


** Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*

*** The external diameter may differ from the rated up to ± 10 %*



СБнлШнг 3х240-1 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured, with low-flammable PVC-compound protection hose

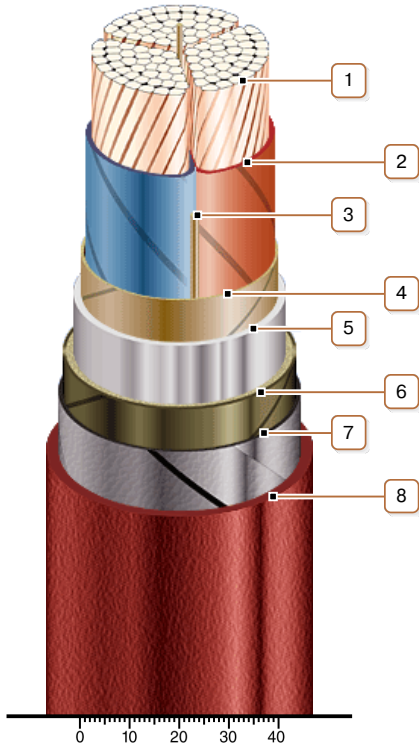

CONSTRUCTION

1. Copper multiwire compact conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Lead sheath
6. Plastic-tape and glass-tape bedding
7. Double galvanized steel-tape armour
8. Pressed off low-flammable PVC compound protection hose

Note: Conductor twisting is not illustrated