

## СБл 4x150-1 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured

Cables are used for laying:

- in soil (trenches) with high corrosiveness without vagabond currents
- in soil (trenches) with medium corrosiveness, as well as with vagabond currents
- in mines, non-hazardous as for gas and dust
- with a risk of mechanical damage and no tensile forces in operation

### TECHNICAL SPECIFICATIONS

|  |                 |                 |
|--|-----------------|-----------------|
| Rated voltage  | kV              | 1               |
| Number and rated area of conductors  | mm <sup>2</sup> | 4 x 150         |
| Insulation thickness between conductors                                      | mm              | 1.7             |
| Insulation thickness of conductor-sheath                                     | mm              | 1.45            |
| Sheath thickness   | mm              | 1.52            |
| Permissible continuous current rating *                                      |                 |                 |
| • by aerial laying   | A               | 372             |
| • by burial  | A               | 339             |
| Operating temperature range  | °C              | -50 ... +50     |
| Minimum bending radius by laying   | mm              | 780             |
| Level difference along the laying rout, not more than                        | m               | 20              |
| Metal sheath outer diameter (for reference only)                             | mm              | 40              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 52              |
| Cable weight (approximate)   | kg/km           | 9300            |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 430 • 4.5 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated during operation in four-wire networks with load in all the conductors for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



## СБл 4x150-1 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured

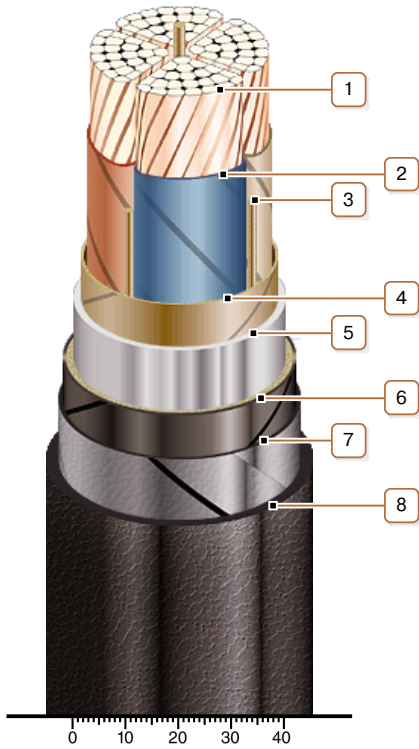

### CONSTRUCTION

1. Copper multiwire compact conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Lead sheath
6. Single-layer plastic-tape bedding
7. Double steel-tape armour
8. Outer covering

Note: Conductor twisting is not illustrated