**СБГ 3x50(ож)-6**  
**ТУ У 27.3-00214534-091:2017**

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured

Cables are used for laying:

- *in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosiveness*
- *in fire-risk premises*
- *on technological trestles*
- *on special cable bridges*
- *with a risk of mechanical damage and no tensile forces in operation*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*

**TECHNICAL SPECIFICATIONS**


|  |                 |                                     |
|--|-----------------|-------------------------------------|
| Rated voltage  | kV              | 6                                   |
| Number and rated area of conductors  | mm <sup>2</sup> | 3 x 50                              |
| Insulation thickness between conductors                                      | mm              | 4                                   |
| Insulation thickness of conductor-sheath                                     | mm              | 2.95                                |
| Sheath thickness   | mm              | 1.26                                |
| Permissible continuous current rating *                                      |                 |                                     |
| • <i>by aerial laying</i>  | A               | 200                                 |
| • <i>by burial</i>   | A               | 197                                 |
| Operating temperature range  | °C              | -50 ... +50                         |
| Minimum bending radius by laying   | mm              | 510                                 |
| Level difference along the laying rout, not more than                        | m               | 15                                  |
| Metal sheath outer diameter (for reference only)                             | mm              | 26                                  |
| Rated outer diameter of the cable (for reference) **                         | mm              | 34                                  |
| Cable weight (approximate)   | kg/km           | 3580                                |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 16: 330 • 1.4<br># 16a: 870 • 3.4 |

Notes:

*When ordering it is necessary to agree the factory length of the product with the manufacturer*


*\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m*

*\*\* The external diameter may differ from the rated up to ± 10 %*



## СБГ 3x50(ож)-6 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-tape armoured

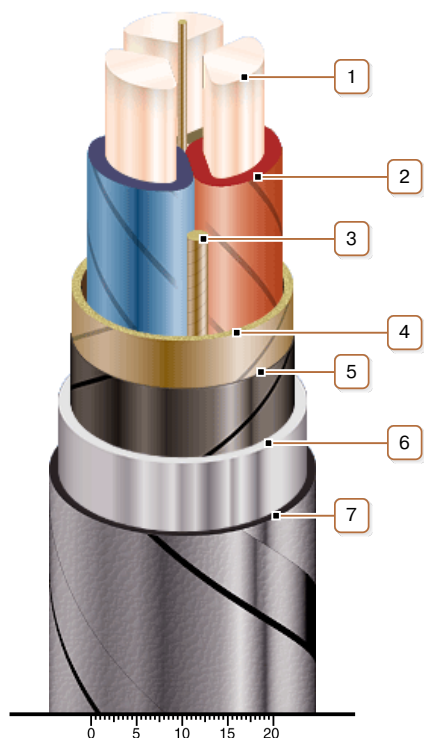

### CONSTRUCTION

1. Copper conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Conducting paper screen
6. Lead sheath
7. Double galvanized steel-tape armour

*Note: Conductor twisting is not illustrated*