



## ЦСБГ 3x185-10 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with non-draining impregnated paper insulation, lead-sheathed, steel-tape armoured

Cables are used for laying:

- *without level difference limitation*
- *in dry premises (tunnels), ducts, cable cellars, mines, collectors, industrial and other premises, including damp, partially flooded premises, environment with medium and high corrosiveness*
- *in fire-risk premises*
- *on technological trestles*
- *on special cable bridges*
- *with a risk of mechanical damage and no tensile forces in operation*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                 |
|------------------------------------------------------------------------------|-----------------|-----------------|
| Rated voltage                                                                | kV              | 10              |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 3 x 185         |
| Insulation thickness between conductors                                      | mm              | 5.5             |
| Insulation thickness of conductor-sheath                                     | mm              | 4               |
| Sheath thickness                                                             | mm              | 1.66            |
| Permissible continuous current rating *                                      |                 |                 |
| • <i>by aerial laying</i>                                                    | A               | 442             |
| • <i>by burial</i>                                                           | A               | 352             |
| Operating temperature range                                                  | °C              | -50 ... +50     |
| Minimum bending radius by laying                                             | mm              | 840             |
| Metal sheath outer diameter (for reference only)                             | mm              | 49              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 56              |
| Cable weight (approximate)                                                   | kg/km           | 10360           |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 370 • 4.3 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



**ЦСБГ 3x185-10**  
**ТУ У 27.3-00214534-091:2017**

Power cables with copper conductors, with non-draining impregnated paper insulation, lead-sheathed, steel-tape armoured

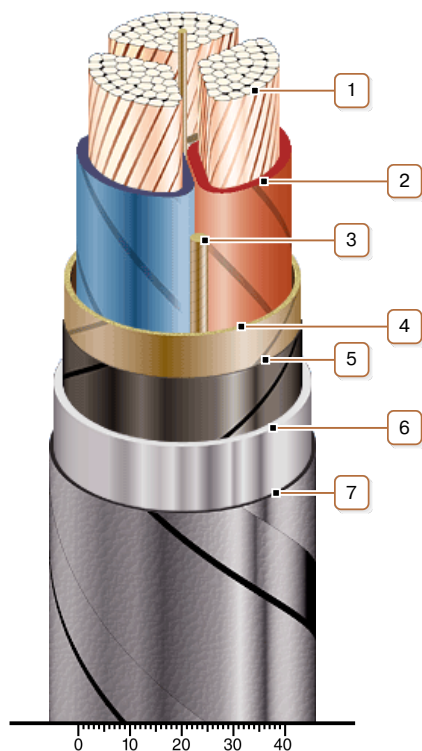

## CONSTRUCTION

1. Copper multiwire compact conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Conducting paper screen
6. Lead sheath
7. Double galvanized steel-tape armour

*Note: Conductor twisting is not illustrated*