



## СП2лШнг 4x150-1 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-wire armoured, with low-flammable PVC-compound protection hose

Cables are used for laying:

- in soil (trenches) with high corrosiveness, as well as with vagabond currents
- in soil (trenches) with high corrosiveness without vagabond currents
- in mines, non-hazardous as for gas and dust
- with a risk of mechanical damage and tensile forces in operation
- in bunches

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- single wire cable flame retardance
- bunched cable flame retardance category A

### TECHNICAL SPECIFICATIONS

|                                                                              |                 |                 |
|------------------------------------------------------------------------------|-----------------|-----------------|
| Rated voltage                                                                | kV              | 1               |
| Number and rated area of conductors                                          | mm <sup>2</sup> | 4 x 150         |
| Insulation thickness between conductors                                      | mm              | 1.7             |
| Insulation thickness of conductor-sheath                                     | mm              | 1.45            |
| Sheath thickness                                                             | mm              | 1.52            |
| Permissible continuous current rating *                                      |                 |                 |
| • by aerial laying                                                           | A               | 372             |
| • by burial                                                                  | A               | 339             |
| Operating temperature range                                                  | °C              | -50 ... +50     |
| Minimum bending radius by laying                                             | mm              | 840             |
| Level difference along the laying rout, not more than                        | m               | 20              |
| Metal sheath outer diameter (for reference only)                             | mm              | 40              |
| Rated outer diameter of the cable (for reference) **                         | mm              | 56              |
| Cable weight (approximate)                                                   | kg/km           | 11360           |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t            | # 18: 370 • 4.7 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

\* Long permissible current loads are calculated during operation in four-wire networks with load in all the conductors for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m


\*\* The external diameter may differ from the rated up to ± 10 %



## СП2лШнг 4x150-1 ТУ У 27.3-00214534-091:2017

Power cables with copper conductors, with impregnated paper insulation, lead-sheathed, steel-wire armoured, with low-flammable PVC-compound protection hose

### CONSTRUCTION

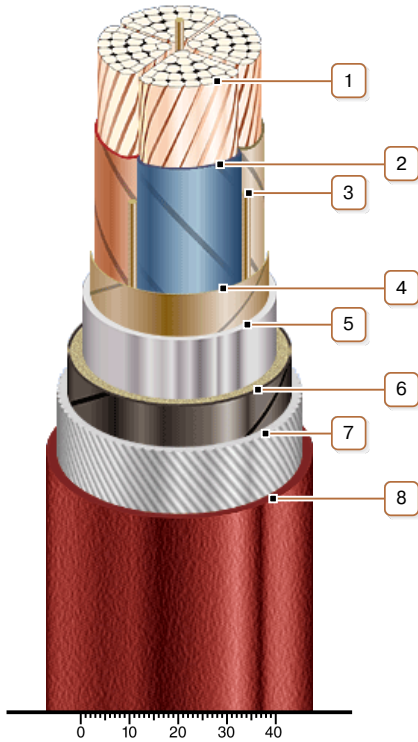

1. Copper multiwire compact conductor
2. Impregnated paper insulation
3. Cable paper bundle
4. Belt insulation
5. Lead sheath
6. Double-layer plastic-tape bedding
7. Round galvanized steel-wire armour
8. Pressed off low-flammable PVC compound protection hose

Note: Conductor twisting is not illustrated