



## **ВВГнг 1х800-1** **ТУ У 31.3-00214534-018-2003**

Power cables with copper conductors, with PVC-compound insulation, with low-flammable PVC-compound outer sheath

Cables are used for laying:

- *in bunches*
- *in premises, dry ducts and tunnels, in corrosive environment*

Fire safety code in accordance with ДСТУ 4809:2007: ПБ120000000

Products of this mark meet the requirements:

- *single wire cable flame retardance*
- *bunched cable flame retardance category A*

### **TECHNICAL SPECIFICATIONS**

Rated voltage	kV	1
Number and rated area of conductors	mm <sup>2</sup>	1 x 800
Phase insulation thickness	mm	3.2
Permissible continuous current rating (AC of industrial frequency) *		
• <i>by aerial laying</i>	A	1030
• <i>by burial</i>	A	856
Permissible continuous current rating (DC) *		
• <i>by aerial laying</i>	A	1481
• <i>by burial</i>	A	1502
Maximum permissible conductor temperature		
• <i>Continuous</i>	°C	+70
• <i>in emergency operation</i>	°C	+90
• <i>at short circuit</i>	°C	+140
Operating temperature range	°C	-50 ... +50
Minimum bending radius by laying	mm	470
Rated outer diameter of the cable (for reference) **	mm	47
Cable weight (approximate)	kg/km	8290
Rated factory cable length and gross weight of the delivery on the drums ***	m, t	# 18: 500 • 4.6 # 20: 800 • 7.3

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer


\* Long permissible current loads are calculated for the following conditions: air temperature plus 25 °C, soil temperature plus 15 °C, thermal resistivity of soil 1.2 °K·m/W, laying depth in the soil 0.7 m

\*\* The external diameter may differ from the rated up to ± 10 %



**ВВГнг 1х800-1**  
**ТУ У 31.3-00214534-018-2003**

Power cables with copper conductors, with PVC-compound insulation, with low-flammable PVC-compound outer sheath

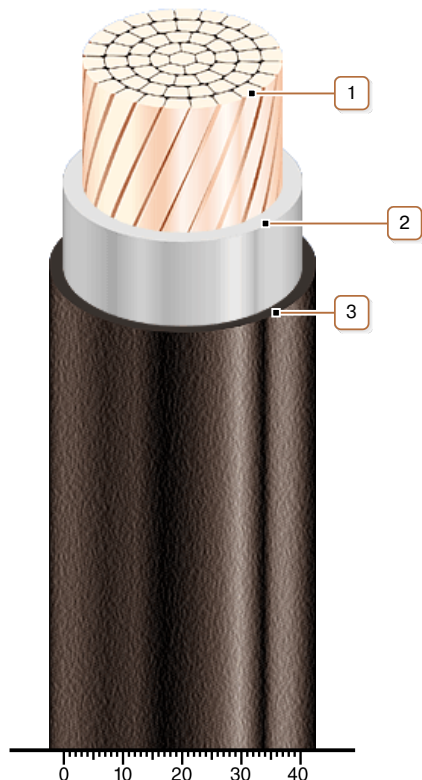

### CONSTRUCTION

1. Copper multiwire compact conductor
2. PVC compound insulation
3. Low flammable PVC compound outer sheath