
**СІПн-1 3x16+1x25**  
**ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013**

Self-supporting flame-retardant wires with polymer compound insulation, with neutral carrier non-insulated conductor

Used for laying:

- trunks of aerial electric power lines and line branches for the rated voltage of 0.6/1 kV
- in air, types I and II according to ГОСТ 15150-69

It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

Fire safety code in accordance with ДСТУ 4809:2007: ПБ100000000

Products of this mark meet the requirements:

- single wire cable flame retardance

**TECHNICAL SPECIFICATIONS**


Rated voltage	kV	0.6 / 1
Number and rated area of phase conductors	mm <sup>2</sup>	3 x 16
Carrier neutral conductor rated area	mm <sup>2</sup>	25
Phase insulation thickness	mm	1.3
Current ratings *		
• Continous	A	100
• at short circuit (not more than 1 s)	KA	1.5
Maximum permissible conductor temperature		
• Continous	°C	+90
• at short circuit (not more than 5 s)	°C	+250
Operating temperature range	°C	-60 ... +50
Permissible temperature of laying (installation), no less than	°C	-20
Minimum bending radius by laying	mm	206
Rated outer diameter of the cable (for reference) **	mm	20.6
Weight (approximate)	kg/km	270
Rated factory cable length and gross weight of the delivery on the drums ***	m, t	# 16a: 2530 • 0.9 # 18: 2890 • 1.2 # 20: 4630 • 1.9

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

 \* Long permissible current loads are calculated for the following conditions: ambient temperature plus 25 °C, wind speed 0.6 m/s, the intensity of solar radiation 1000 W/m<sup>2</sup>


\*\* The external diameter may differ from the rated up to ± 10 %



**СІПн-1 3x16+1x25**  
**ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013**

Self-supporting flame-retardant wires with polymer compound insulation, with neutral carrier non-insulated conductor

## CONSTRUCTION

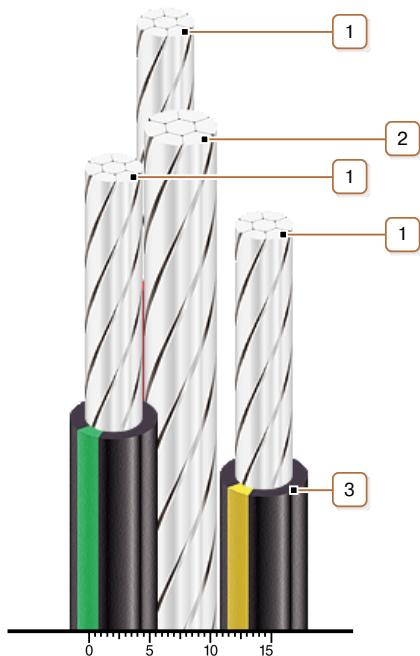

### 1. Aluminium multiwire compacted conductor

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

### 2. Multiwire aluminium-alloy compacted supporting conductor

*Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials*

### 3. Flame-retardant polymer compound insulation

*Note: Wire lay-up is not illustrated.*