

СІП-2 3x35+1x54.6+1x16

ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013

Self-supporting wires with light-stabilized cross-linked polyethylene insulation, with neutral carrier insulated conductor

Used for laying:

- trunks of aerial electric power lines and line branches for the rated voltage of 0.6/1 kV
- in air, types II and III according to ГОСТ 15150-69, including on sea coasts, salt lakes, in industrial areas and areas of saline sands

It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

TECHNICAL SPECIFICATIONS

| | | |
|--|-----------------|--|
| Rated voltage | kV | 0.6 / 1 |
| Number and rated area of phase conductors | mm ² | 3 x 35 |
| Number and rated area of additional conductors for light circuits | mm ² | 1 x 16 |
| Carrier neutral conductor rated area | mm ² | 54.6 |
| Phase insulation thickness | mm | 1.3 |
| Current ratings * | | |
| • Continious | A | 160 |
| • at short circuit (not more than 1 s) | KA | 3.2 |
| Maximum permissible conductor temperature | | |
| • Continious | °C | +90 |
| • at short circuit (not more than 5 s) | °C | +250 |
| Operating temperature range | °C | -60 ... +50 |
| Permissible temperature of laying (installation), no less than | °C | -20 |
| Minimum bending radius by laying | mm | 314 |
| Rated outer diameter of the cable (for reference) ** | mm | 31.4 |
| Weight (approximate) | kg/km | 650 |
| Rated factory cable length and gross weight of the delivery on the drums *** | m, t | # 16a: 990 • 0.9 # 18: 1130 • 1.2 # 20: 1810 • 1.8 |

Notes:

When ordering it is necessary to agree the factory length of the product with the manufacturer

* Long permissible current loads are calculated for the following conditions: ambient temperature plus 25 °C, wind speed 0.6 m/s, the intensity of solar radiation 1000 W/m²

** The external diameter may differ from the rated up to ± 10 %




200203-013035116546



СІП-2 3x35+1x54.6+1x16
ДСТУ 4743:2007, ТУ У 27.3-00214534-066:2013

Self-supporting wires with light-stabilized cross-linked polyethylene insulation, with neutral carrier insulated conductor

CONSTRUCTION

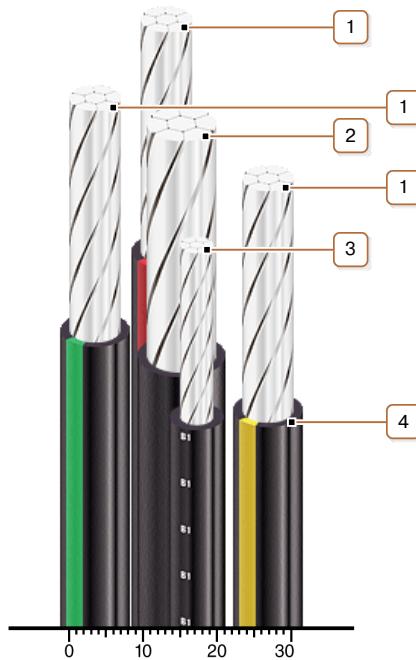

1. Aluminium multiwire compacted conductor

Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

2. Multiwire aluminium-alloy compacted supporting conductor

Note: It is possible to manufacture the wire with longitudinal core sealing by water-blocking materials

3. Multiwire compacted aluminium assisting conductor for light circuits

4. Light-stabilized cross-linked polyethylene insulation

Note: Wire lay-up is not illustrated.